



40LMA

50Hz Chilled Water Fan Coil Unit with EC Motor Option

Cooling Capacity: 73kW~26.5kW



CERTIFIED TO ISO 9001:2008
REG. NO. 0239AR

Model Number Nomenclature	2
Features & Benefits	3
Specifications	
Technical Data	4
Physical Dimension	5
Performance Data (AC Motor)	
Fan Performance Curves (4 Row)	6
Fan Performance Curves (6 Row)	8
Performance Data (EC Motor)	
Fan Performance Curves (4 Row)	10
Fan Performance Curves (6 Row)	12
Performance Data	
Coil Pressure Drop (4 Row)	14
Coil Pressure Drop (6 Row)	15
Performance Data (AC & EC Motor)	
Chilled Water Coils (4 Row)	16
Chilled Water Coils (6 Row)	18
Hot Water Coils (1 Row, 2 Curcuits)	20
Sound Pressure Level	22
Electrical Data	23

Module Number Nomenclature

4	0	L	M	A	0	2	4	-	-	-	7	0	0	2	5
					UNIT SIZE						UNIT VERSION				
					024						0 - Unit with AC Motor				
					040						E - Unit with EC Motor				
					060										
					080										
											FILTER OPTIONS				
											Standard - Without filter track media				
											Special A Half inch filter				
											1 1 inch filter				
											COIL TYPE				
											Standard - 4 row Chilled Water				
											Special 6 6 row Chilled Water				
											J 4R Chilled Water + 1R Hot Water				
											K 6R Chilled Water + 1R Hot Water				



FAN COIL SELECTION PROGRAM

We have made available a computer program to finalize your selections. Please contact your Carrier representative for a computer selection based on your "Quick Selection" plus the design parameters on your application.

Features & Benefits

Any room, every room flexibility in an air conditioning system.

This range of 40LMA Fan Coil Units are designed to be used with chilled and optional hot water. These units incorporate high performance qualities and versatility with space saving advantages.

The 40LMA units have a clean appearance and are designed with flexibility in mind. This allows for almost any plant room configuration or ceiling space application. A nominal cooling capacity range of 7 kW to 26 kW is available for the 40LMA units.

All units have forward curved direct drive fans. These are purposely selected to maintain the lowest possible fan outlet velocity, whilst ensuring the selection point remains in the stable operating area of the fan curve. This guarantees the customer a quiet and stable air distribution with predictable fan performance.

The standard unit is constructed from galvanized steel with 25mm polyurethane of 20kg/m³ density laminated with aluminum foil heat seal insulation. This type of insulation will protect the unit from excessive noise and thermal bridging.

Standard Features



- ☑ 4 row cooling coils.
- ☑ Direct drive fans.
- ☑ 25mm aluminum foil faced PU lining.
- ☑ Condensate drain pan of powder coated galvanized steel with PE insulation.
- ☑ Horizontal front configuration.
- ☑ Left or right piping connection available.
- ☑ Easy access panel – maximum serviceability.

Optional Features


- ☑ 6 row cooling coils.
- ☑ Hot water coils.
- ☑ Return air filter media 12mm EU2 or 25mm EU3 add-on frame.
- ☑ Stainless steel condensate drain pan with PE insulation.
- ☑ EC Motor.

MODEL			40LMA024		4LMA040		40LMA060		40LMA080			
Coil	Chilled Water	Type	Copper Tube, Aluminium Fin									
		Nominal Capacity	kW	7.3	10.5	12.0	14.9	17.7	20.5	23.6	26.5	
			Btu/h	24,898	35,984	40,968	50,753	60,480	70,027	80,733	90,405	
		Face Area	m ²	0.19		0.29		0.33		0.43		
		No. of Rows		4	6	4	6	4	6	4	6	
		Fin Type		Lanced Sine Wave Plate Fins								
		Fins/Meter		472								
	Hot Water (Optional)	Type		Copper Tube, Aluminium Fin								
		Nominal Capacity	kW	10.1		17		21.5		28.6		
		Faced Area	m ²	0.19		0.29		0.33		0.43		
		No. of Rows		1								
		Fin Type		Double Wavy Plate Fins								
	Fins/Meter		472									
	Air Flow Range		ℓ/s	400~600		600~800		800~1000		1000~1400		
Fan Motor	Type		Permanent Split Capacitor									
	Quantity		1									
	Power Output	watt	315		462		750		800			
	Speed		3-Speed									
Power Source		V-Ph-Hz	240-1-50									
Min~Max Voltage		Volt	207~253									
Connection	Supply (Chilled Water)		25.4mm (1")									
	Return (Chilled Water)		25.4mm (1")									
	Drain		19mm (3/4") male NPT									
Dimension	WxDxH	mm	754 x 600 x 425		1090 x 600 x 425		1224 x 600 x 425		1556 x 600 x 425			
Operating Weight		Kg	41.0	43.3	56.5	59.5	61.5	65.5	80.0	86.0		
EC Fan Motor Option	Type		Brushless DC Motor with Electronic Controller									
	Quantity		1									
	Power Output Watt		375				800					
	Full Load Amps		3.23				6.57					
	Speed		Multi Speed									


Physical Dimension

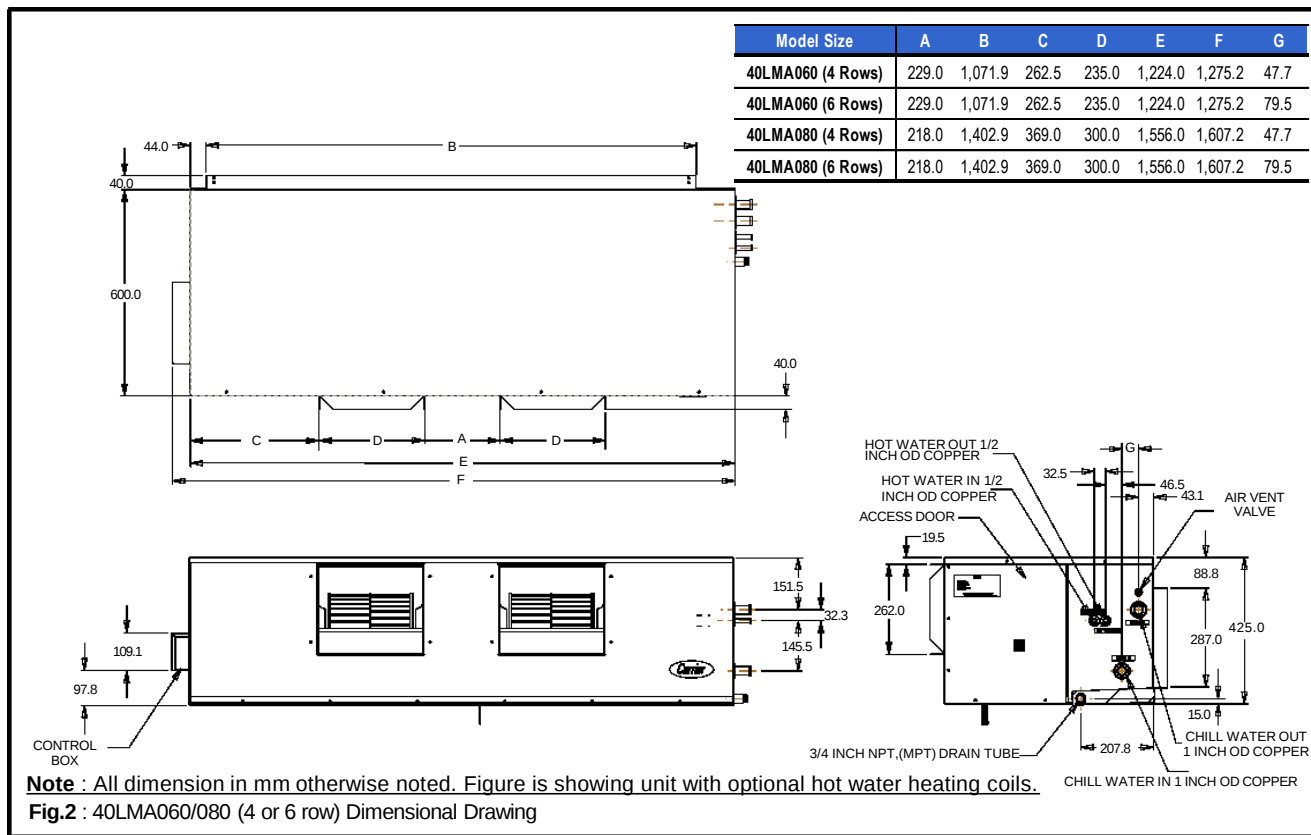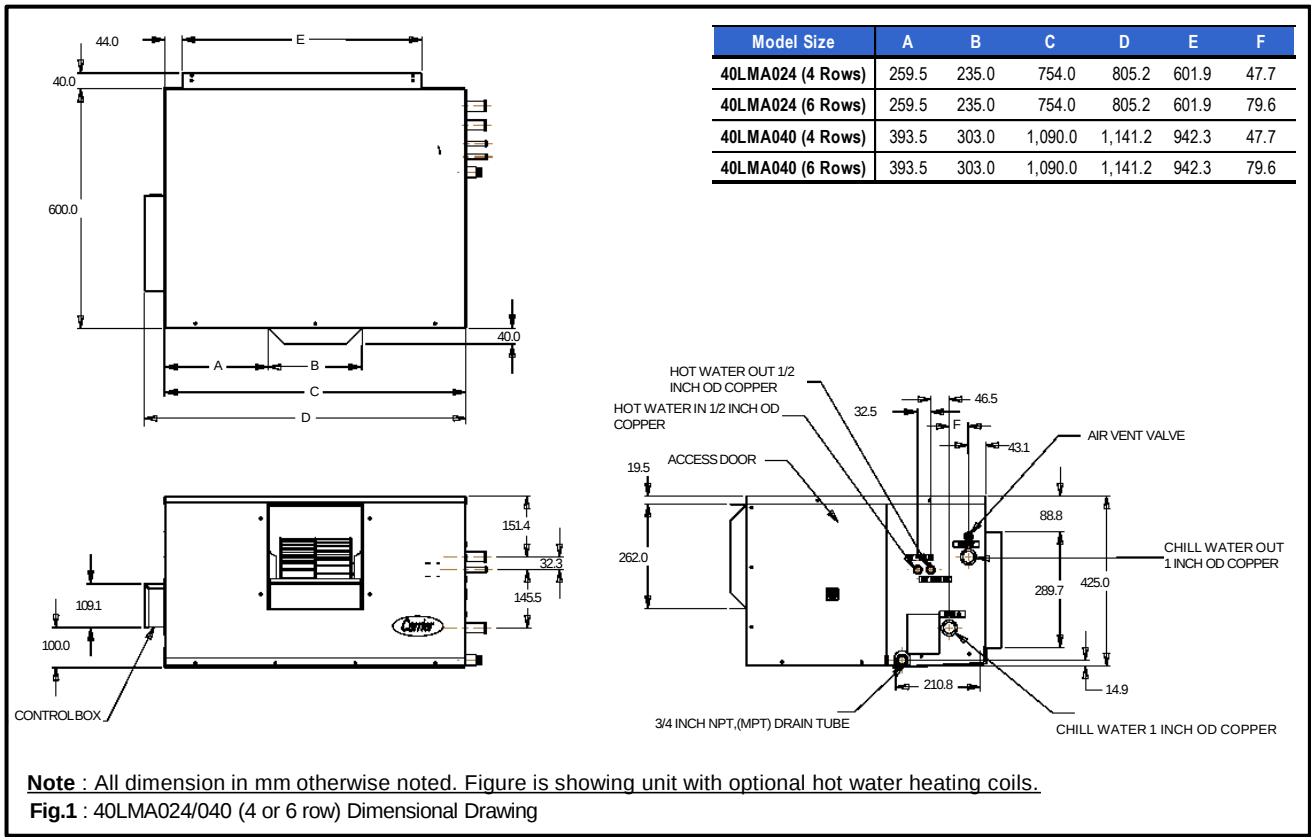


40LMA024 with AC MOTOR

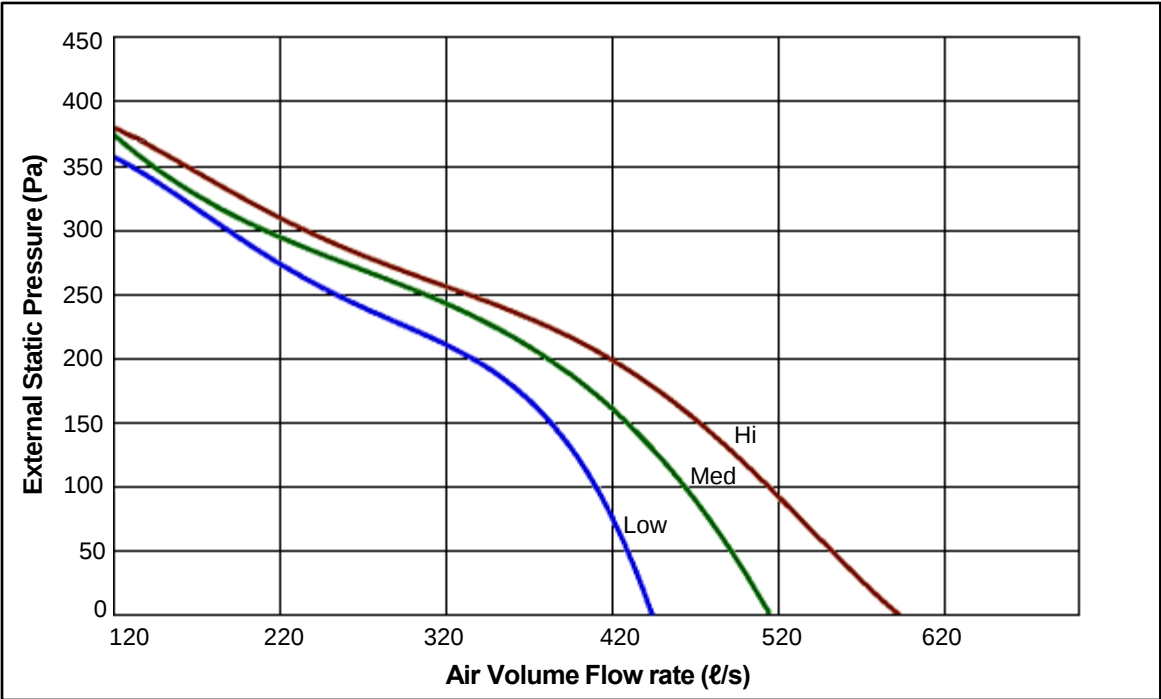


40LMA040 with AC MOTOR

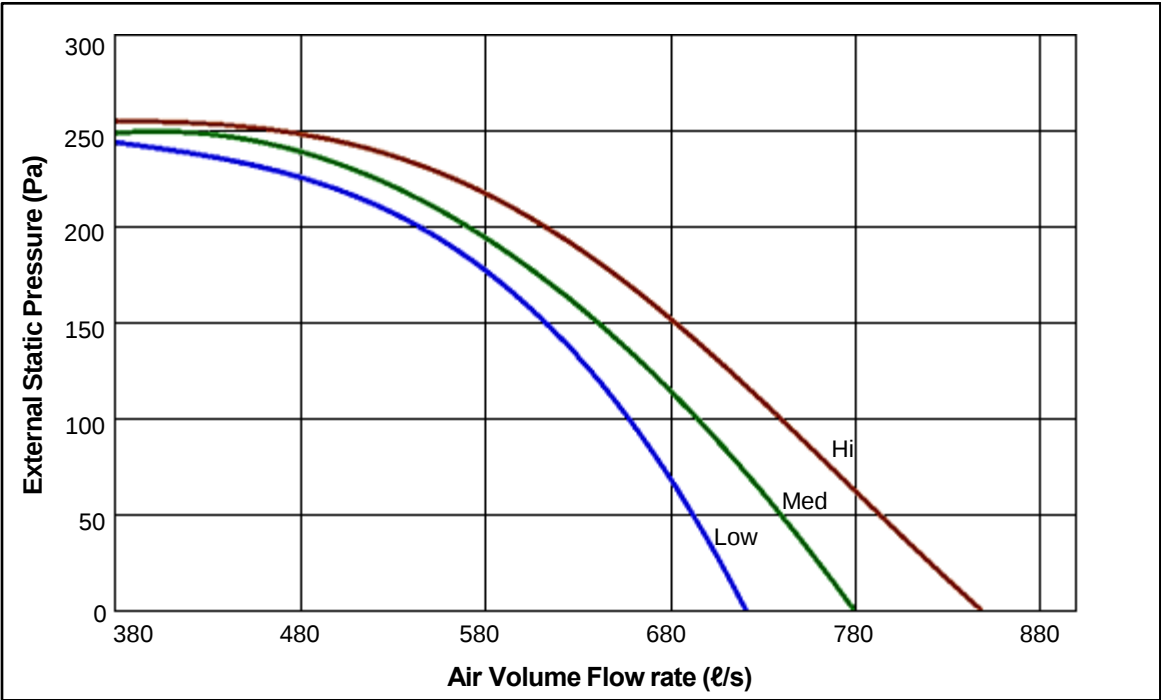


40LMA060 with AC MOTOR

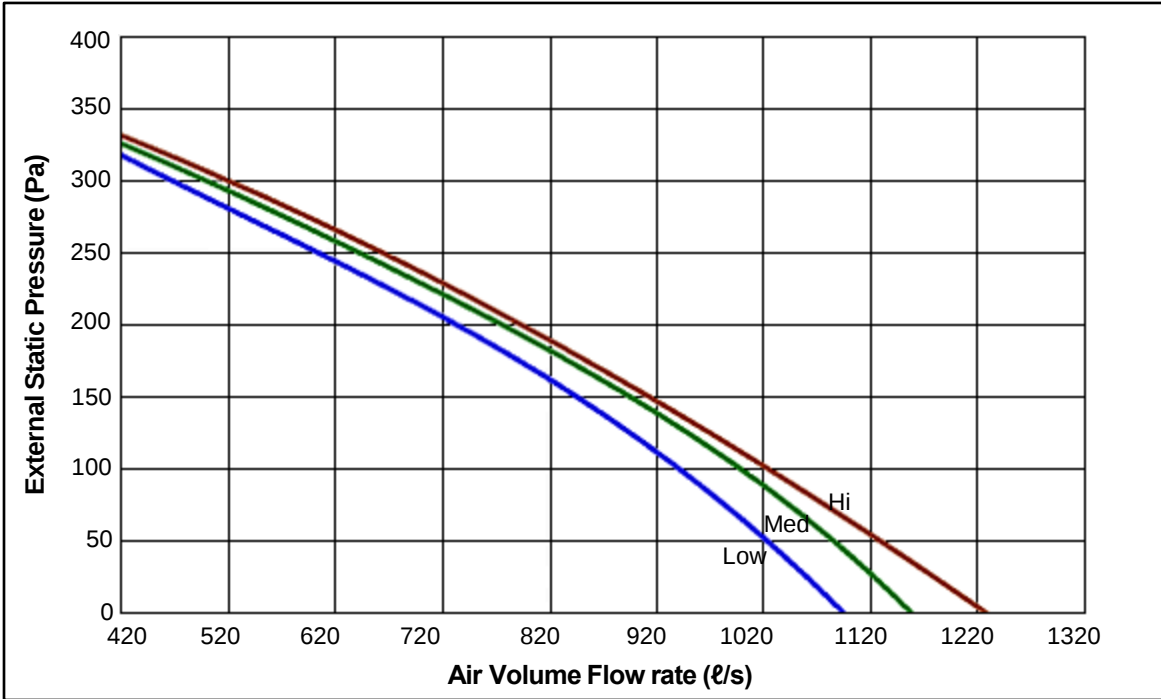


40LMA080 with AC MOTOR

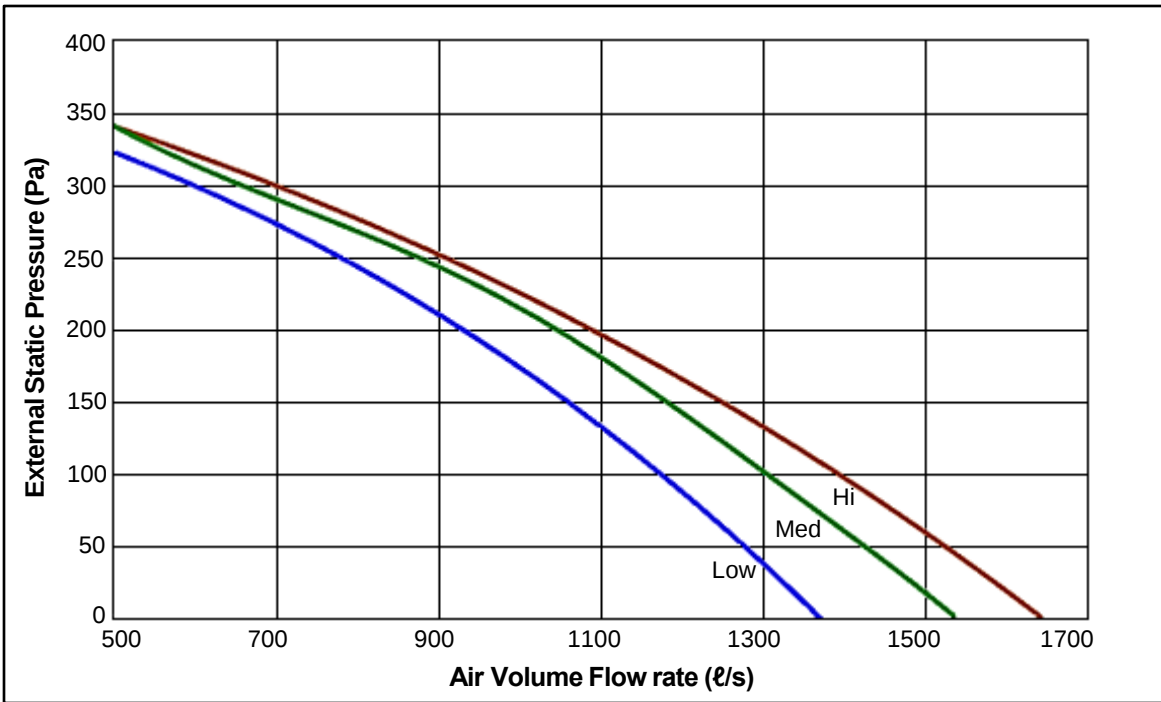


40LMA024 with AC MOTOR

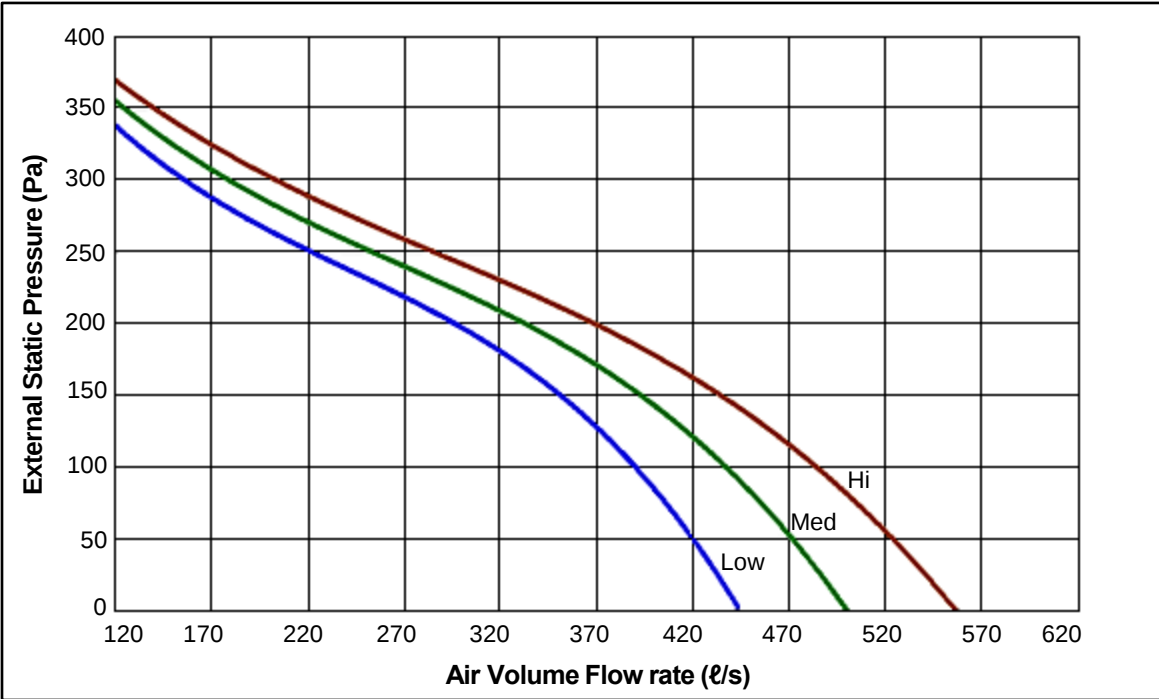


40LMA040 with AC MOTOR

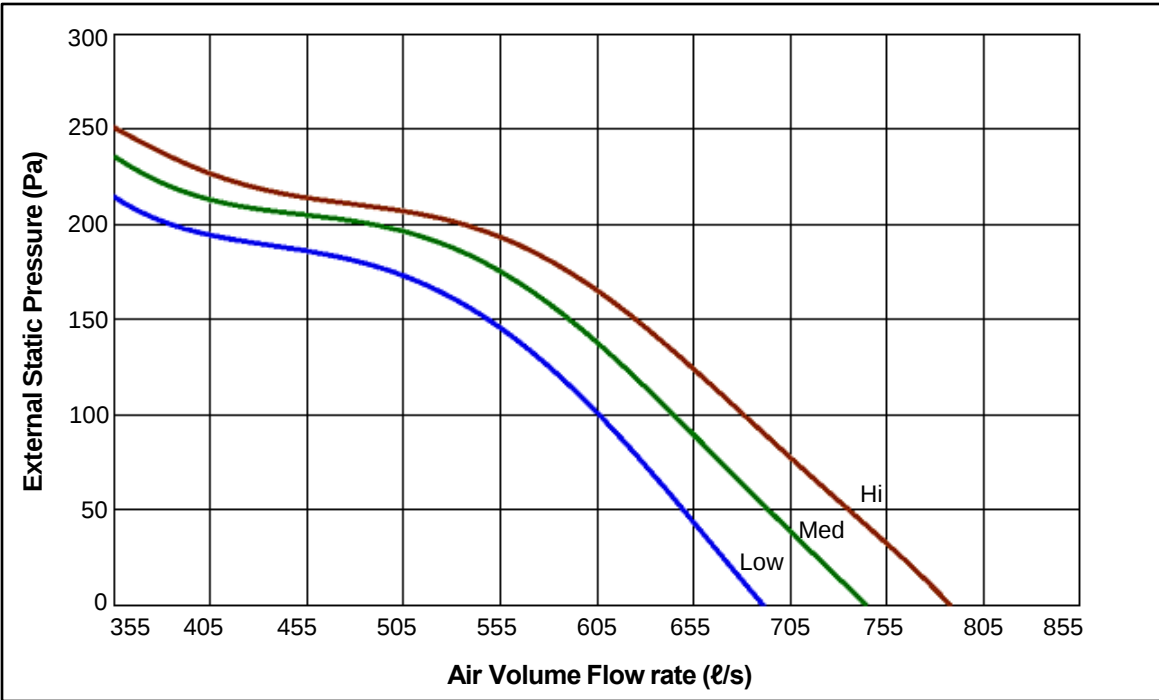


40LMA060 with AC MOTOR

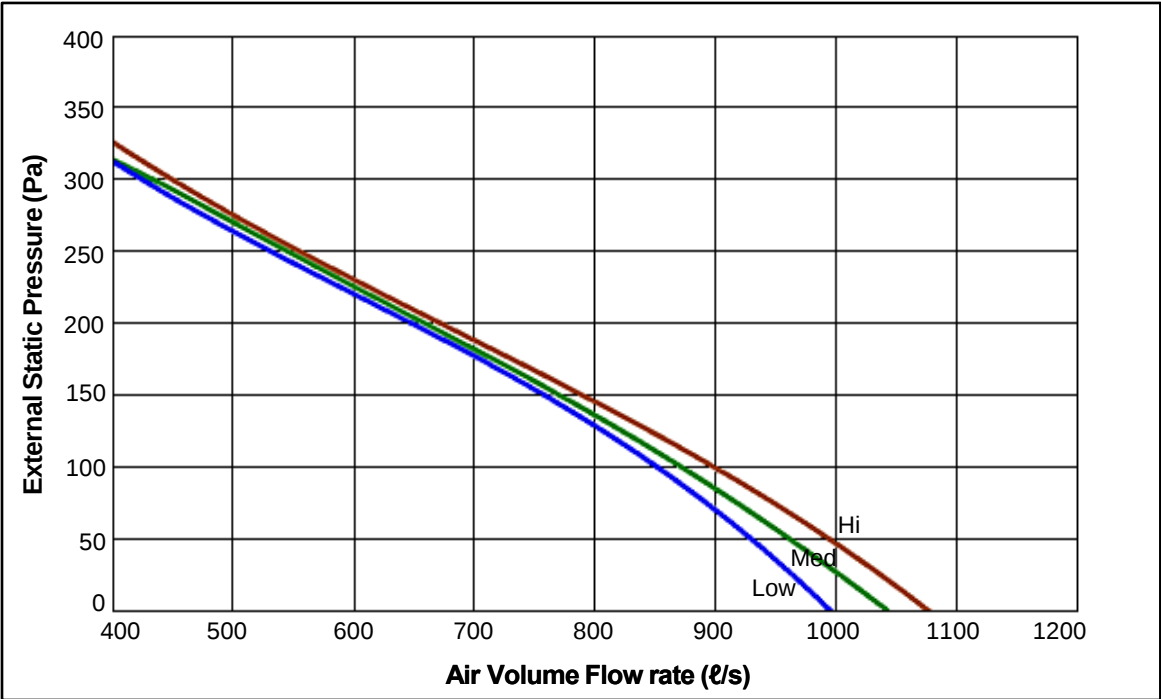

40LMA080 with AC MOTOR

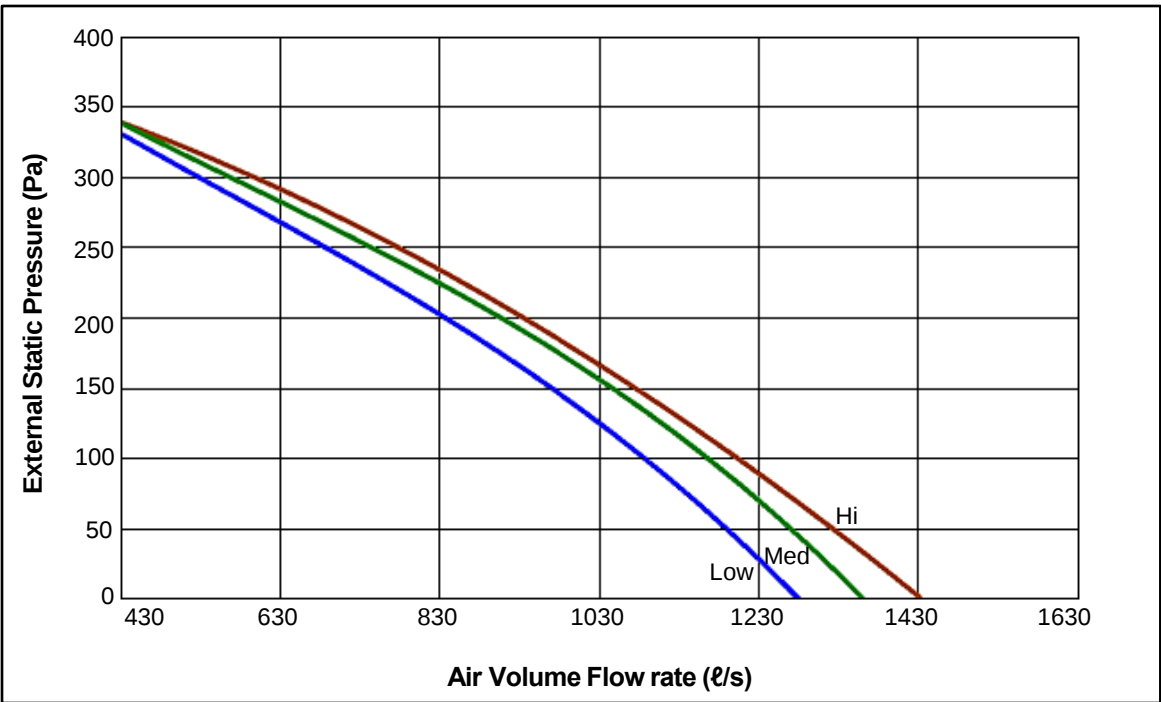


40LMA024 with EC MOTOR

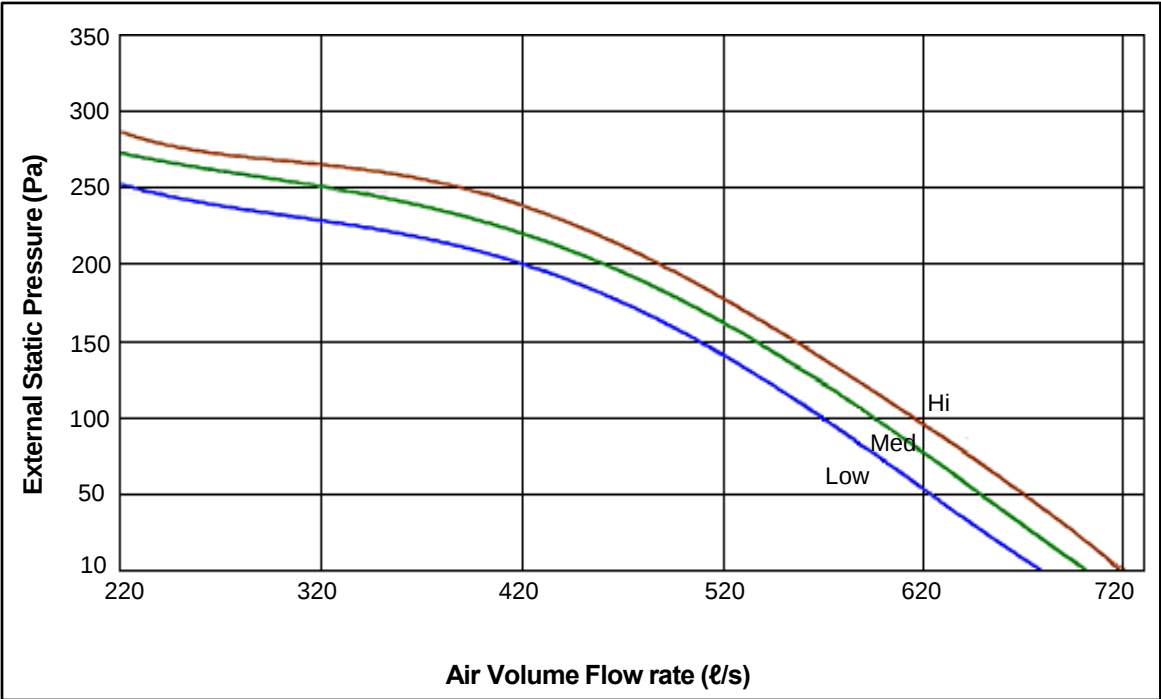


40LMA040 with EC MOTOR




40LMA060 with EC MOTOR

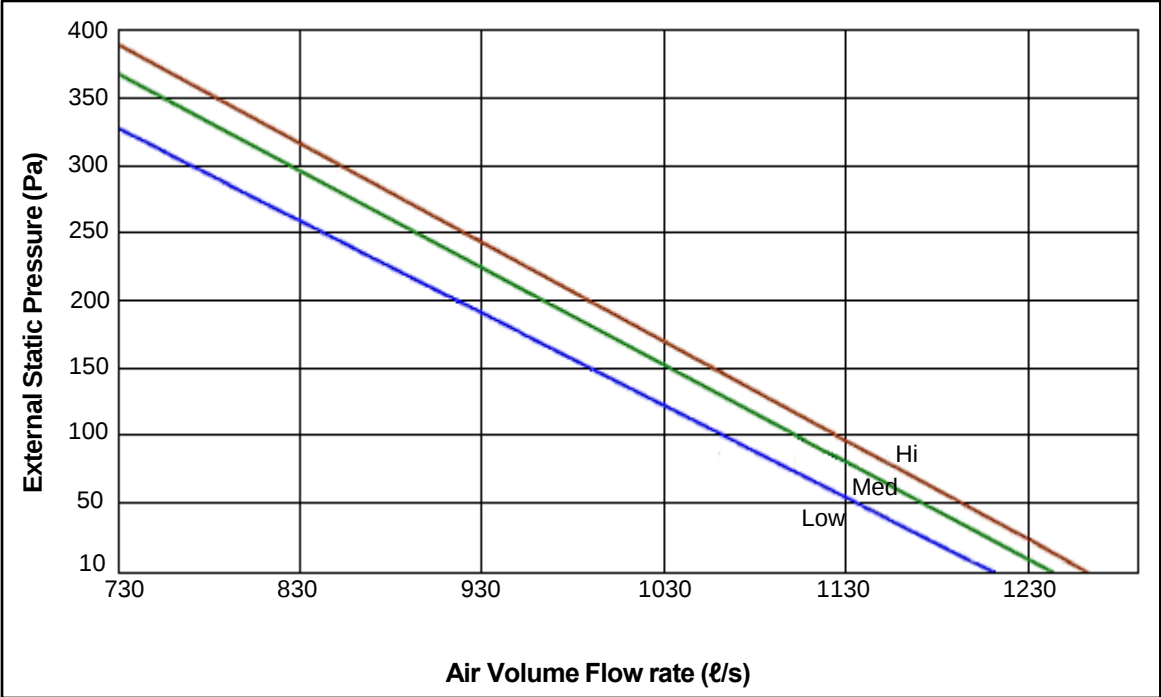


40LMA080 with EC MOTOR

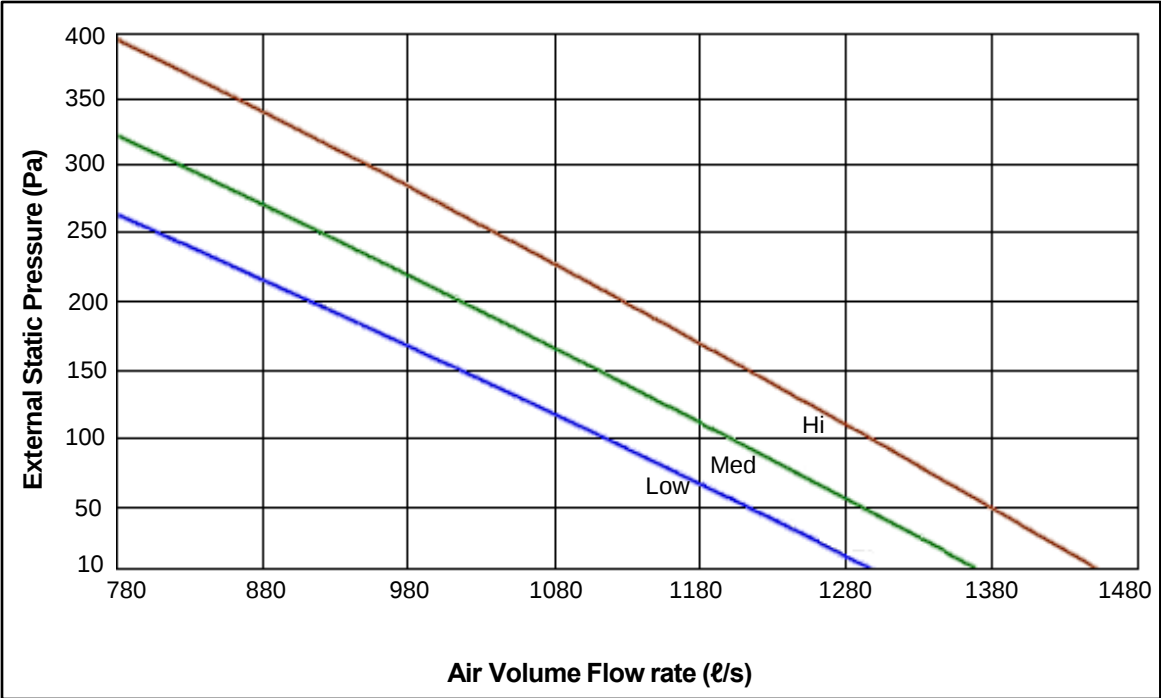


40LMA024 with EC MOTOR

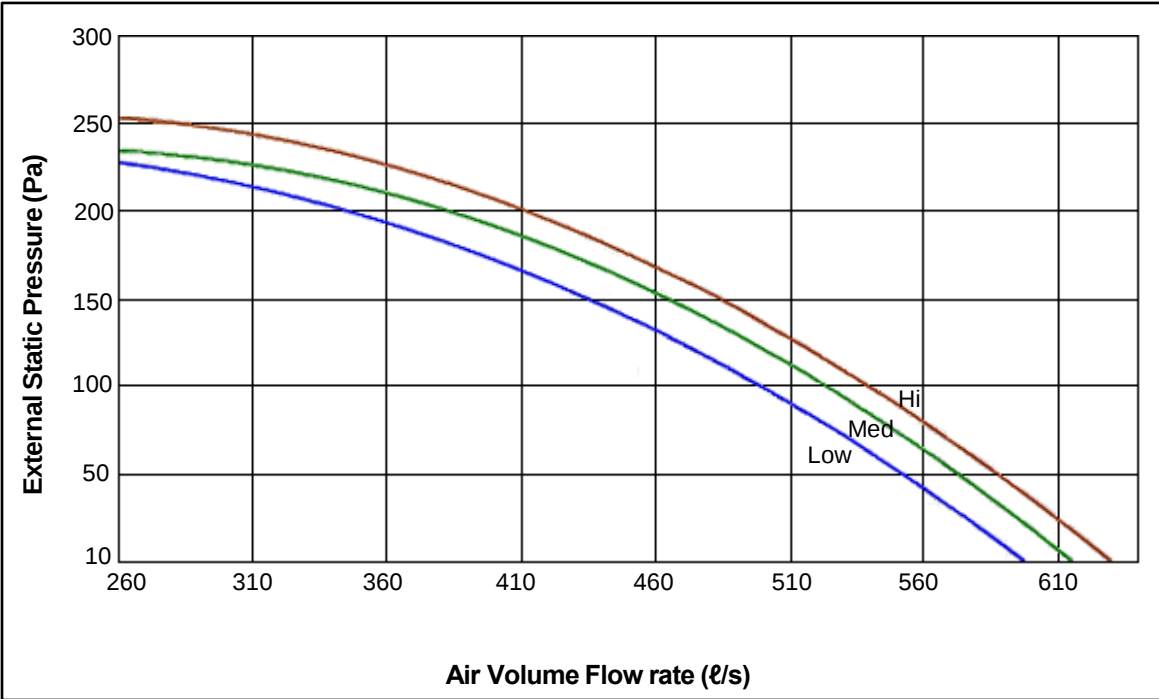


40LMA040 with EC MOTOR

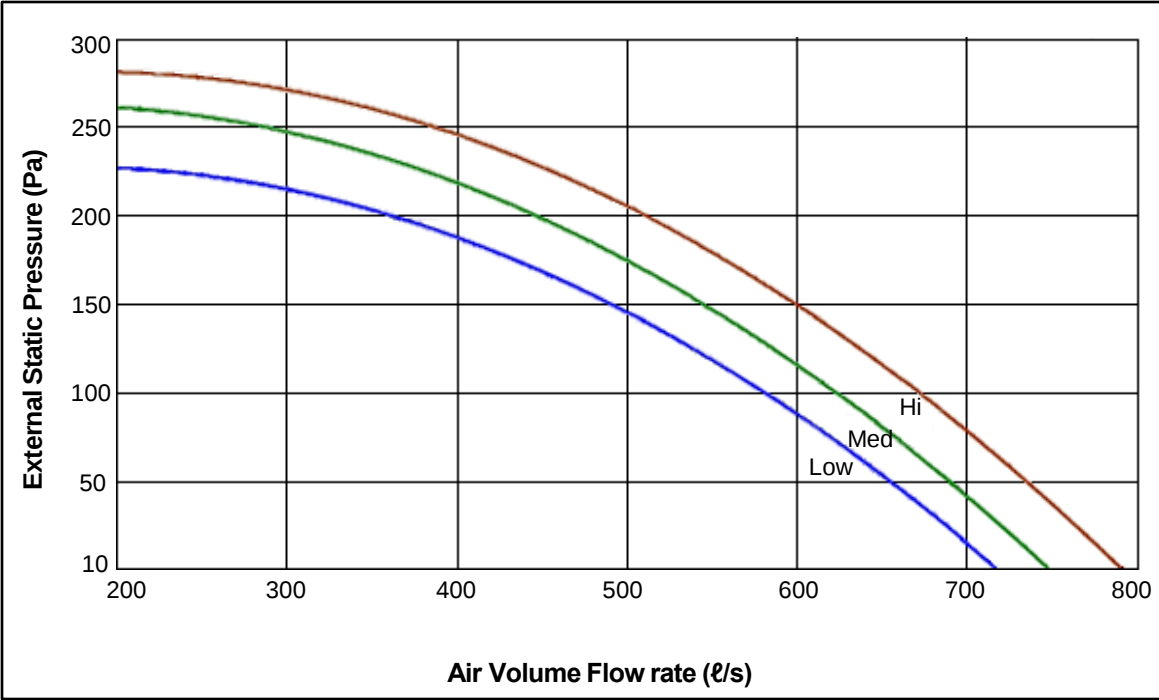


40LMA060 with EC MOTOR

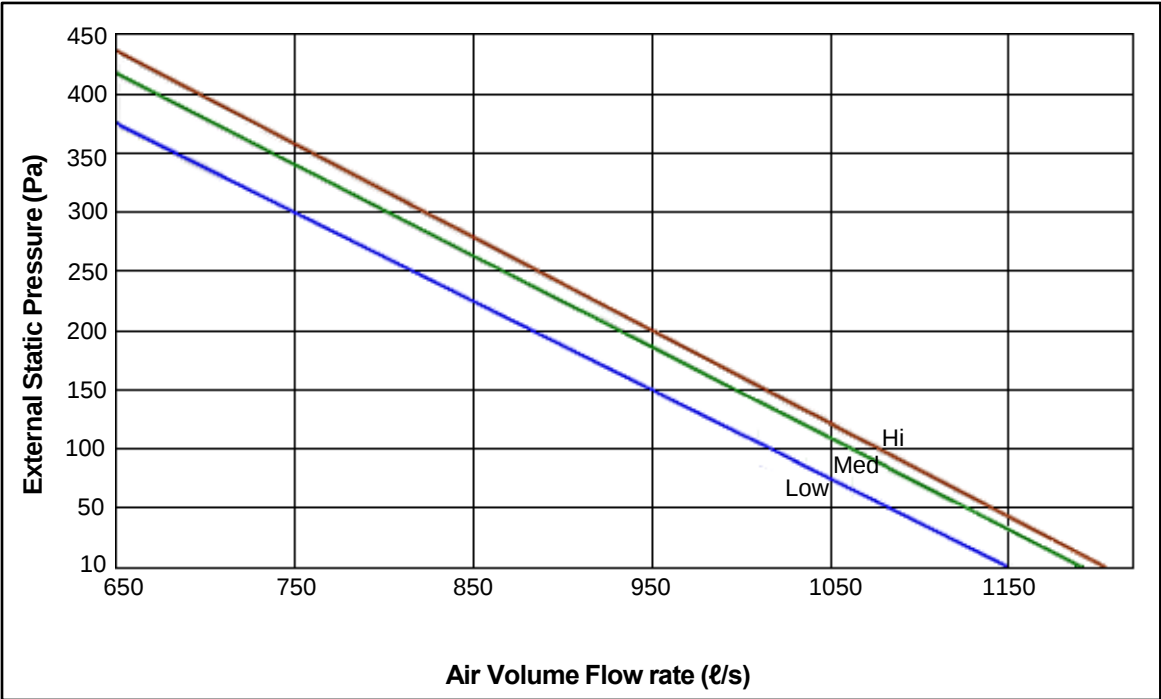


40LMA080 with EC MOTOR

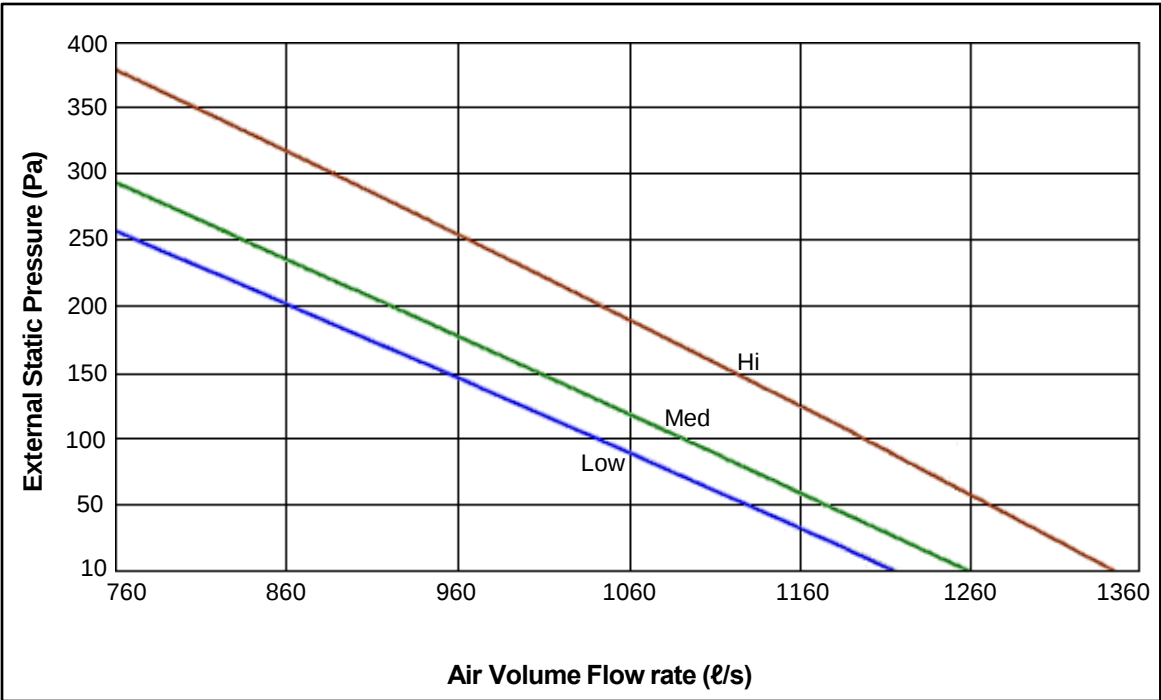


40LMA024 with AC & EC MOTOR

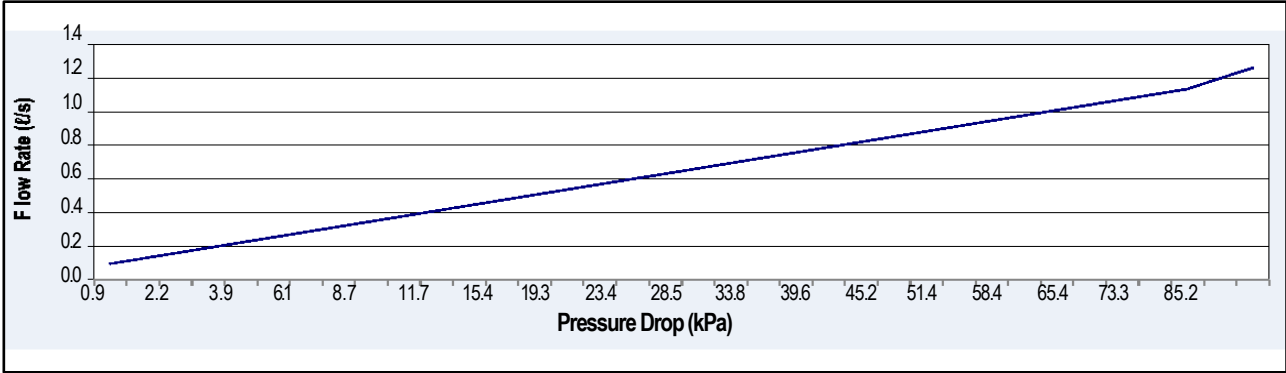


40LMA040 with AC & EC MOTOR

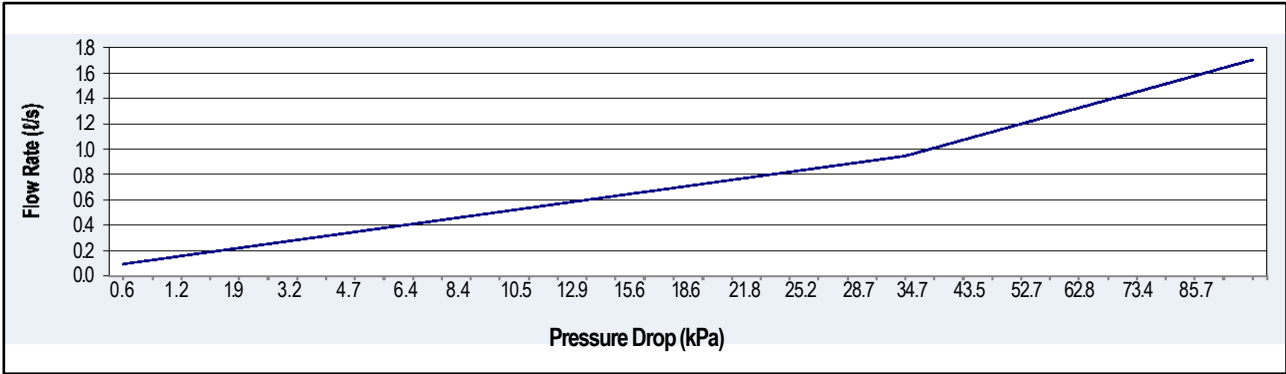


40LMA060 with AC & EC MOTOR

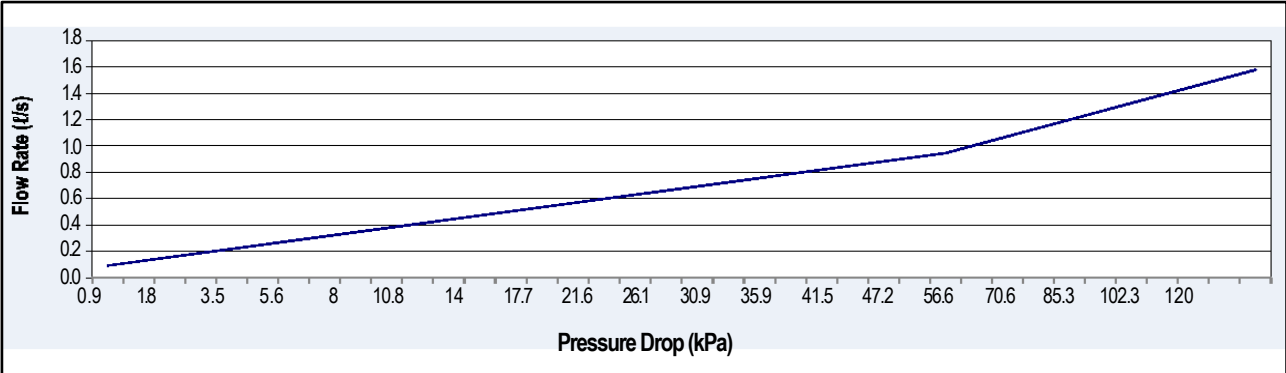


40LMA080 with AC & EC MOTOR

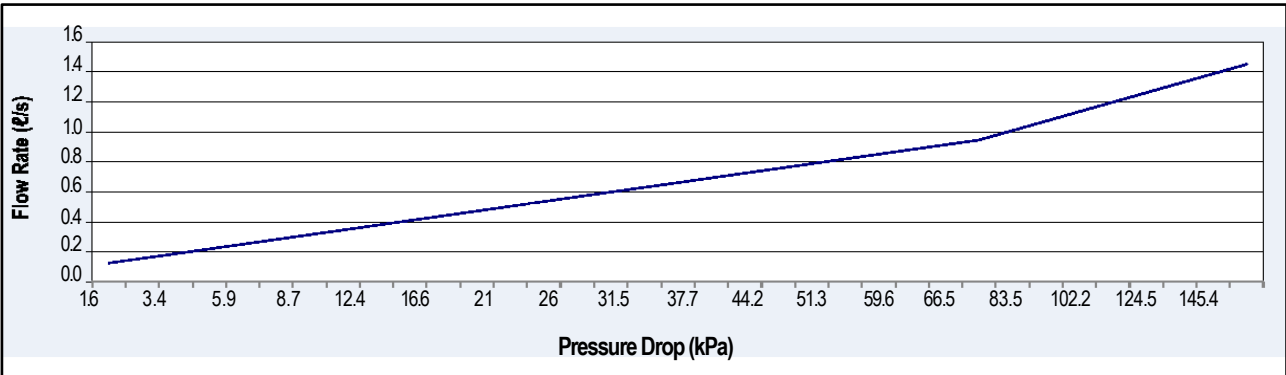


40LMA024 with AC & EC MOTOR

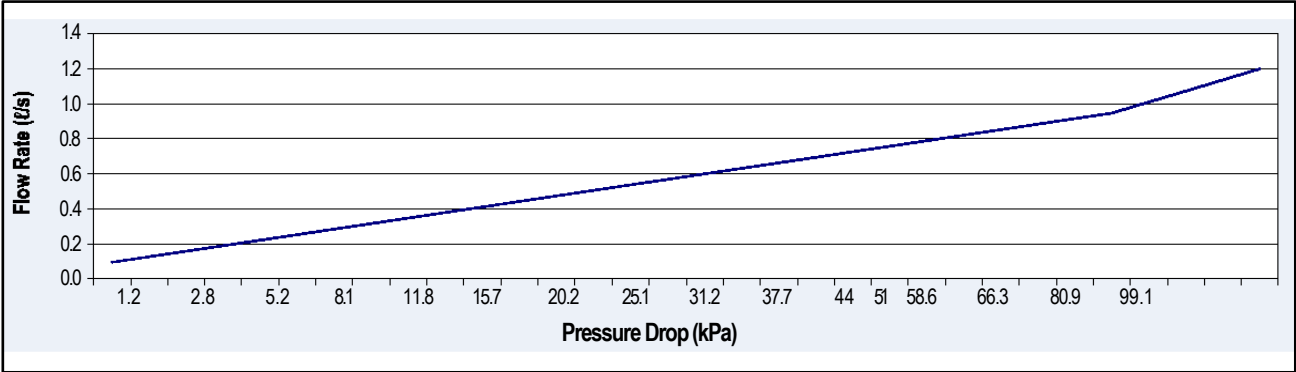


40LMA040 with AC & EC MOTOR

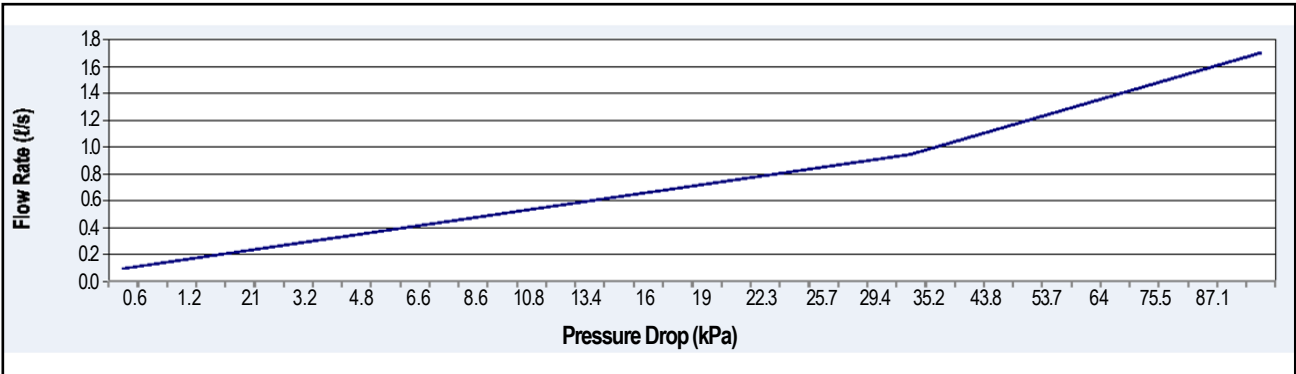

40LMA060 with AC & EC MOTOR

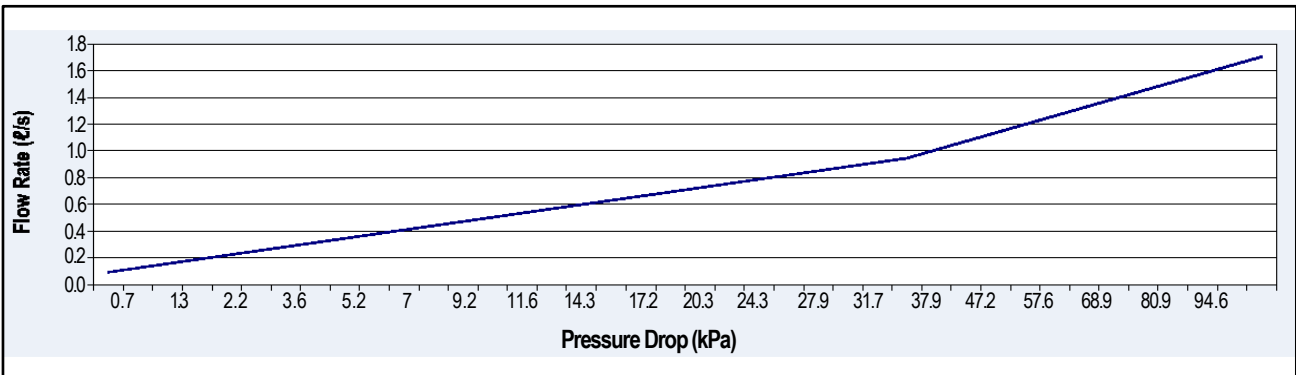

40LMA080 with AC & EC MOTOR

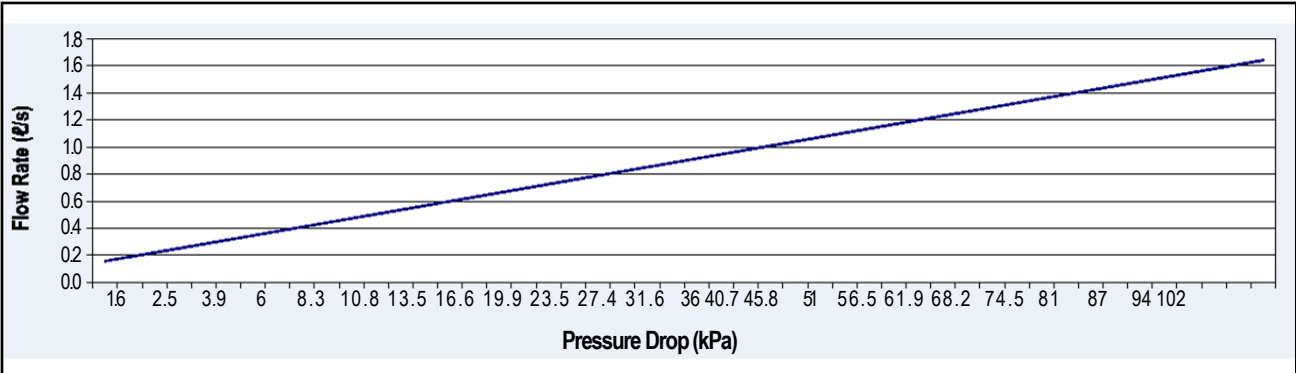

40LMA024 with AC & EC MOTOR

Entering Water Temp (°C)	Speed (Nominal Airflow)		Low (390 ℓ/s)				Medium (450 ℓ/s)				High (500 ℓ/s)			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
	Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19
5	Total Capacity	kW	5.6	6.7	7.9	9.1	6.1	7.4	8.7	9.9	6.6	8.0	9.3	10.7
	Sensible Heat Capacity	kW	4.1	4.8	5.6	6.2	4.5	5.4	6.2	6.9	5.0	5.9	6.7	7.6
	Water Flow	ℓ/s	0.22	0.27	0.31	0.36	0.24	0.29	0.34	0.39	0.26	0.32	0.37	0.42
	Pressure Drop	kPa	3.8	5.6	7.6	9.8	4.6	6.7	9.1	11.4	5.3	7.70	10.3	12.9
6	Total Capacity	kW	4.8	6.0	7.1	8.3	5.3	6.5	7.8	9.1	5.7	7.1	8.4	9.7
	Sensible Heat Capacity	kW	3.8	4.5	5.2	5.9	4.2	5.0	5.8	6.6	4.6	5.5	6.4	7.2
	Water Flow	ℓ/s	0.19	0.24	0.28	0.33	0.21	0.26	0.31	0.36	0.23	0.28	0.33	0.39
	Pressure Drop	kPa	2.9	4.4	6.2	8.3	3.5	5.2	7.4	9.7	4.0	6.1	8.5	11.0
7	Total Capacity	kW	4.1	5.2	6.4	7.5	4.6	5.8	7.0	8.2	4.9	6.2	7.5	8.9
	Sensible Heat Capacity	kW	3.4	4.2	4.9	5.6	3.8	4.7	5.5	6.2	4.2	5.1	6.0	6.8
	Water Flow	ℓ/s	0.16	0.21	0.25	0.30	0.18	0.23	0.28	0.33	0.20	0.25	0.30	0.35
	Pressure Drop	kPa	2.1	3.4	5.0	6.8	2.6	4.1	6.0	8.1	3.0	4.8	6.9	9.3
8	Total Capacity	kW	3.5	4.6	5.7	6.7	3.9	5.1	6.2	7.4	4.2	5.5	6.7	8.0
	Sensible Heat Capacity	kW	3.1	3.9	4.6	5.3	3.5	4.3	5.1	5.9	3.8	4.7	5.6	6.5
	Water Flow	ℓ/s	0.14	0.18	0.22	0.27	0.15	0.20	0.25	0.30	0.17	0.22	0.27	0.32
	Pressure Drop	kPa	1.6	2.6	3.9	5.6	1.9	3.2	4.8	6.7	2.2	3.7	5.6	7.7
9	Total Capacity	kW	3.0	4.0	5.0	6.1	3.3	4.4	5.5	6.7	3.6	4.8	6.0	7.2
	Sensible Heat Capacity	kW	2.7	3.5	4.3	5.0	3.0	4.0	4.8	5.6	3.3	4.3	5.2	6.1
	Water Flow	ℓ/s	0.12	0.16	0.20	0.24	0.13	0.18	0.22	0.27	0.14	0.19	0.24	0.29
	Pressure Drop	kPa	1.1	2.0	3.1	4.5	1.4	2.4	3.8	5.5	1.6	2.9	4.40	6.4

Note: Performance is based on wet coil, 50Pa ESP, ΔT = 6°C, ½ " filter and 0m altitude

40LMA040 with AC & EC MOTOR

Entering Water Temp (°C)	Speed (Nominal Air Flow)		Low (630 ℓ/s)				Medium (670 ℓ/s)				High (720 ℓ/s)			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
	Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19
5	Total Capacity	kW	8.2	10.0	11.8	13.7	8.6	10.5	12.4	14.2	9.0	11.0	12.9	14.9
	Sensible Heat Capacity	kW	6.2	7.4	8.5	9.6	6.5	7.8	9.0	10.1	6.9	8.2	9.5	10.7
	Water Flow	ℓ/s	0.33	0.4	0.47	0.54	0.34	0.42	0.49	0.57	0.36	0.43	0.51	0.59
	Pressure Drop	kPa	4.0	6.0	8.3	11.0	4.4	6.5	9.1	11.7	4.8	7.1	9.9	12.7
6	Total Capacity	kW	7.1	8.8	10.6	12.4	7.4	9.3	11.1	12.9	7.8	9.7	11.6	13.6
	Sensible Heat Capacity	kW	5.7	6.9	8.0	9.1	6.0	7.3	8.4	9.6	6.4	7.7	8.9	10.1
	Water Flow	ℓ/s	0.28	0.35	0.42	0.49	0.30	0.37	0.44	0.51	0.31	0.39	0.46	0.54
	Pressure Drop	kPa	3.0	4.7	6.7	9.1	3.3	5.1	7.3	9.9	3.7	5.60	8.0	10.7
7	Total Capacity	kW	6.1	7.8	9.5	11.2	6.4	8.1	9.9	11.7	6.7	8.6	10.4	12.3
	Sensible Heat Capacity	kW	5.2	6.4	7.5	8.6	5.5	6.7	7.9	9.1	5.8	7.1	8.4	9.6
	Water Flow	ℓ/s	0.24	0.31	0.38	0.45	0.25	0.32	0.39	0.47	0.27	0.34	0.41	0.49
	Pressure Drop	kPa	2.2	3.6	5.4	7.5	2.4	4.0	5.9	8.2	2.7	4.4	6.5	9.0
8	Total Capacity	kW	5.2	6.8	8.4	10.1	5.4	7.1	8.8	10.6	5.7	7.5	9.3	11.1
	Sensible Heat Capacity	kW	4.7	5.9	7.1	8.1	4.9	6.2	7.4	8.6	5.2	6.6	7.8	9.1
	Water Flow	ℓ/s	0.21	0.27	0.34	0.40	0.22	0.28	0.35	0.42	0.23	0.30	0.37	0.44
	Pressure Drop	kPa	1.6	2.8	4.3	6.1	1.8	3.1	4.7	6.7	2.0	3.4	5.1	7.4
9	Total Capacity	kW	4.4	5.9	7.5	9.1	4.6	6.2	7.9	9.5	4.9	6.6	8.3	10.0
	Sensible Heat Capacity	kW	4.0	5.4	6.5	7.7	4.2	5.6	6.9	8.1	4.4	5.9	7.3	8.5
	Water Flow	ℓ/s	0.17	0.24	0.30	0.36	0.18	0.25	0.31	0.38	0.19	0.26	0.33	0.40
	Pressure Drop	kPa	1.2	2.1	3.4	4.9	1.3	2.3	3.7	5.4	1.4	2.6	4.1	6.0

Note: Performance is based on wet coil, 50Pa ESP, ΔT = 6°C, ½ " filter and 0m altitude

40LMA060 with AC & EC MOTOR

Entering Water Temp (°C)	Speed (Normal Airflow)		Low (930 ℓ/s)				Medium (990 ℓ/s)				High (1030 ℓ/s)			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
	Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19
5	Total Capacity	kW	13.3	15.7	18.1	20.5	13.8	16.2	18.7	21.2	14.1	16.6	19.1	21.7
	Sensible Heat Capacity	kW	9.6	11.2	12.7	14.2	10.0	11.7	13.3	14.8	10.3	12.0	13.7	15.3
	Water Flow	ℓ/s	0.53	0.62	0.72	0.81	0.55	0.64	0.74	0.84	0.56	0.66	0.76	0.86
	Pressure Drop	kPa	18.0	23.9	30.6	38.1	19.1	25.4	32.5	40.5	19.9	26.4	33.9	42.2
6	Total Capacity	kW	11.7	14.0	16.3	18.7	12.1	14.5	16.9	19.4	12.4	14.9	17.3	19.9
	Sensible Heat Capacity	kW	8.9	10.5	12.0	13.5	9.3	11.0	12.6	14.1	9.6	11.3	12.9	14.5
	Water Flow	ℓ/s	0.47	0.56	0.65	0.74	0.48	0.58	0.67	0.77	0.49	0.59	0.69	0.79
	Pressure Drop	kPa	14.3	19.5	25.6	32.4	15.2	20.8	27.2	34.5	15.8	21.6	28.3	35.9
7	Total Capacity	kW	10.2	12.5	14.7	17.1	10.6	12.9	15.3	17.7	10.8	13.2	15.7	18.1
	Sensible Heat Capacity	kW	8.2	9.8	11.4	12.8	8.6	10.3	11.9	13.4	8.8	10.6	12.2	13.8
	Water Flow	ℓ/s	0.41	0.50	0.59	0.68	0.42	0.51	0.61	0.70	0.43	0.53	0.62	0.72
	Pressure Drop	kPa	11.2	15.8	21.2	27.3	11.9	16.9	22.6	29.1	12.4	17.6	23.6	30.4
8	Total Capacity	kW	8.8	11.0	13.2	15.5	9.1	11.4	13.7	16.1	9.4	11.7	14.1	16.5
	Sensible Heat Capacity	kW	7.5	9.1	10.7	12.2	7.8	9.6	11.2	12.7	8.1	9.8	11.5	13.1
	Water Flow	ℓ/s	0.35	0.44	0.53	0.62	0.36	0.45	0.55	0.64	0.37	0.47	0.56	0.66
	Pressure Drop	kPa	8.5	12.7	17.5	23.0	9.2	13.6	18.6	24.5	9.7	14.2	19.4	25.6
9	Total Capacity	kW	7.5	9.7	11.9	14.0	7.8	10.1	12.3	14.6	8.0	10.3	12.6	14.9
	Sensible Heat Capacity	kW	6.7	8.4	10.0	11.5	7.0	8.8	10.5	12.0	7.2	9.1	10.8	12.4
	Water Flow	ℓ/s	0.30	0.39	0.47	0.56	0.31	0.40	0.49	0.58	0.32	0.41	0.50	0.59
	Pressure Drop	kPa	6.3	10.1	14.3	19.2	6.8	10.8	15.3	20.5	7.2	11.3	16.0	21.4

Note: Performance is based on wet coil, 50Pa ESP, ΔT = 6°C, ½ “ filter and 0m altitude

40LMA080 with AC & EC MOTOR

Entering Water Temp (°C)	Speed (Normal Airflow)		Low (1160 ℓ/s)				Medium (1300 ℓ/s)				High (1390 ℓ/s)			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
	Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19
5	Total Capacity	kW	18.4	21.4	24.5	27.6	19.7	22.9	26.2	29.5	20.4	23.8	27.3	30.8
	Sensible Heat Capacity	kW	12.8	14.8	16.8	18.6	13.9	16.1	18.2	20.2	14.5	16.9	19.1	21.2
	Water Flow	ℓ/s	0.73	0.85	0.97	1.10	0.78	0.91	1.04	1.17	0.81	0.95	1.08	1.22
	Pressure Drop	kPa	43.9	57.3	72.4	89.2	49.2	64.3	81.4	100.5	52.6	68.9	87.2	107.8
6	Total Capacity	kW	16.2	19.2	22.2	25.3	17.3	20.5	23.7	27.1	18.0	21.3	24.7	28.2
	Sensible Heat Capacity	kW	11.9	13.9	15.8	17.7	12.9	15.1	17.2	19.2	13.5	15.8	18.1	20.2
	Water Flow	ℓ/s	0.64	0.76	0.88	1.01	0.69	0.81	0.94	1.08	0.71	0.85	0.98	1.12
	Pressure Drop	kPa	34.8	46.8	60.6	76.2	39.1	52.6	68.1	85.7	41.9	56.4	73.0	91.9
7	Total Capacity	kW	14.1	17.1	20.0	23.0	15.1	18.3	21.4	24.7	15.8	19.1	22.4	25.7
	Sensible Heat Capacity	kW	11.0	13.0	14.9	16.8	11.9	14.1	16.2	18.3	12.5	14.8	17.0	19.2
	Water Flow	ℓ/s	0.56	0.68	0.80	0.92	0.60	0.73	0.85	0.98	0.63	0.76	0.89	1.02
	Pressure Drop	kPa	27.4	38.0	50.1	64.1	30.8	42.9	56.6	72.3	33.1	46.1	60.9	77.6
8	Total Capacity	kW	12.2	15.1	18.0	20.9	13.1	16.2	19.3	22.5	13.7	16.9	20.1	23.4
	Sensible Heat Capacity	kW	10.1	12.1	14.1	15.9	10.9	13.2	15.3	17.3	11.5	13.8	16.1	18.2
	Water Flow	ℓ/s	0.49	0.60	0.72	0.83	0.52	0.64	0.77	0.89	0.54	0.67	0.80	0.93
	Pressure Drop	kPa	21.0	30.5	41.4	53.9	23.8	34.4	46.8	61.0	25.6	37.0	50.4	65.7
9	Total Capacity	kW	10.5	13.3	16.0	18.9	11.3	14.3	17.2	20.3	11.8	14.9	18.0	21.2
	Sensible Heat Capacity	kW	9.2	11.2	13.2	15.1	10.0	12.2	14.4	16.4	10.5	12.8	15.1	17.3
	Water Flow	ℓ/s	0.42	0.53	0.64	0.75	0.45	0.57	0.69	0.81	0.47	0.59	0.72	0.84
	Pressure Drop	kPa	16.2	24.2	33.6	45.0	18.3	27.5	38.2	50.9	19.8	29.6	41.2	54.8

Note: Performance is based on wet coil, 50Pa ESP, ΔT = 6°C, ½ “ filter and 0m altitude

40LMA024 with AC & EC MOTOR

Entering Water Temp (°C)	Speed (Normal Airflow)		Low (380 ℓ/s)				Medium (430 ℓ/s)				High (475 ℓ/s)			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
	Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19
5	Total Capacity	kW	7.2	8.5	9.8	11.1	7.8	9.2	10.6	12.0	8.4	9.9	11.3	12.8
	Sensible Heat Capacity	kW	4.6	5.4	6.1	6.8	5.1	5.9	6.7	7.5	5.5	6.4	7.3	8.1
	Water Flow	ℓ/s	0.29	0.34	0.39	0.44	0.31	0.37	0.42	0.48	0.33	0.39	0.45	0.51
	Pressure Drop	kPa	8.7	12.1	15.4	19.1	10.2	13.9	17.6	21.8	11.8	15.6	19.9	24.7
6	Total Capacity	kW	6.3	7.6	8.8	10.1	6.8	8.2	9.6	10.9	7.3	8.8	10.3	11.7
	Sensible Heat Capacity	kW	4.3	5.0	5.8	6.5	4.7	5.5	6.3	7.1	5.1	6.0	6.9	7.7
	Water Flow	ℓ/s	0.25	0.30	0.35	0.4	0.27	0.33	0.38	0.43	0.29	0.35	0.41	0.47
	Pressure Drop	kPa	6.6	9.6	12.8	16.2	7.8	11.3	14.7	18.5	9.0	12.7	16.6	21.0
7	Total Capacity	kW	5.4	6.6	7.9	9.2	5.8	7.2	8.6	10.0	6.3	7.8	9.2	10.7
	Sensible Heat Capacity	kW	3.9	4.7	5.4	6.1	4.3	5.1	5.9	6.7	4.7	5.6	6.5	7.3
	Water Flow	ℓ/s	0.21	0.26	0.32	0.37	0.23	0.29	0.34	0.40	0.25	0.31	0.37	0.42
	Pressure Drop	kPa	4.9	7.5	10.5	13.6	5.8	8.8	12.1	15.6	6.7	10.1	13.8	17.7
8	Total Capacity	kW	4.6	5.8	7.0	8.3	5.0	6.3	7.6	9.0	5.4	6.8	8.2	9.7
	Sensible Heat Capacity	kW	3.6	4.3	5.1	5.8	3.9	4.8	5.6	6.3	4.3	5.2	6.1	6.9
	Water Flow	ℓ/s	0.18	0.23	0.28	0.33	0.20	0.25	0.30	0.36	0.21	0.27	0.33	0.38
	Pressure Drop	kPa	3.6	5.7	8.3	11.4	4.2	6.7	9.8	13.0	4.9	7.8	11.3	14.7
9	Total Capacity	kW	3.9	5.0	6.2	7.4	4.2	5.5	6.8	8.1	4.5	5.9	7.3	8.7
	Sensible Heat Capacity	kW	3.2	4.0	4.7	5.4	3.6	4.4	5.2	6.0	3.9	4.8	5.7	6.5
	Water Flow	ℓ/s	0.15	0.20	0.25	0.30	0.17	0.22	0.27	0.32	0.18	0.24	0.29	0.35
	Pressure Drop	kPa	2.6	4.3	6.5	9.3	3.0	5.1	7.7	10.8	3.5	5.9	9.0	12.2

Note: Performance is based on wet coil, 50Pa ESP, ΔT = 6°C, ½ " filter and 0m altitude

40LMA040 with AC & EC MOTOR

Entering Water Temp (°C)	Speed (Normal Airflow)		Low (590 ℓ/s)				Medium (630 ℓ/s)				High (670 ℓ/s)			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
	Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19
5	Total Capacity	kW	10.0	12.0	14.0	15.9	10.5	12.5	14.5	16.6	10.9	13.1	15.2	17.3
	Sensible Heat Capacity	kW	6.7	7.9	9.0	10.1	7.1	8.3	9.5	10.6	7.4	8.7	9.9	11.1
	Water Flow	ℓ/s	0.40	0.48	0.55	0.63	0.42	0.50	0.58	0.66	0.43	0.52	0.60	0.69
	Pressure Drop	kPa	6.0	8.6	11.6	14.6	6.6	9.3	12.6	15.7	7.1	10.1	13.6	16.8
6	Total Capacity	kW	8.7	10.6	12.6	14.5	9.1	11.1	13.1	15.2	9.4	11.6	13.7	15.8
	Sensible Heat Capacity	kW	6.2	7.3	8.5	9.6	6.5	7.7	8.9	10.0	6.8	8.1	9.3	10.5
	Water Flow	ℓ/s	0.34	0.42	0.50	0.58	0.36	0.44	0.52	0.60	0.38	0.46	0.54	0.63
	Pressure Drop	kPa	4.5	6.8	9.4	12.5	4.9	7.4	10.3	13.6	5.4	8.0	11.1	14.3
7	Total Capacity	kW	7.4	9.3	11.2	13.2	7.8	9.7	11.7	13.7	8.1	10.2	12.2	14.3
	Sensible Heat Capacity	kW	5.7	6.8	7.9	9.0	5.9	7.2	8.4	9.5	6.2	7.5	8.8	10.0
	Water Flow	ℓ/s	0.30	0.37	0.45	0.52	0.31	0.39	0.46	0.55	0.32	0.40	0.48	0.57
	Pressure Drop	kPa	3.3	5.2	7.5	10.3	3.6	5.7	8.2	11.2	4.0	6.2	8.9	12.2
8	Total Capacity	kW	6.3	8.1	10.0	11.8	6.6	8.5	10.4	12.4	6.9	8.9	10.9	12.9
	Sensible Heat Capacity	kW	5.2	6.3	7.4	8.5	5.4	6.7	7.8	9.0	5.7	7.0	8.2	9.4
	Water Flow	ℓ/s	0.25	0.32	0.40	0.47	0.26	0.34	0.41	0.49	0.27	0.35	0.43	0.51
	Pressure Drop	kPa	2.4	4.0	5.9	8.3	2.7	4.3	6.5	9.1	2.9	4.7	7.1	9.9
9	Total Capacity	kW	5.4	7.1	8.8	10.6	5.6	7.4	9.2	11.1	5.9	7.7	9.6	11.6
	Sensible Heat Capacity	kW	4.6	5.9	7.0	8.0	4.9	6.2	7.3	8.5	5.1	6.5	7.7	8.9
	Water Flow	ℓ/s	0.21	0.28	0.35	0.42	0.22	0.29	0.37	0.44	0.23	0.31	0.38	0.46
	Pressure Drop	kPa	1.7	3.0	4.6	6.7	1.9	3.3	5.1	7.3	2.1	3.6	5.5	8.0

Note: Performance is based on wet coil, 50Pa ESP, ΔT = 6°C, ½ " filter and 0m altitude

40LMA060 with AC & EC MOTOR

Entering Water Temp (°C)	Speed (Normal Airflow)		Low (840 ℓ/s)				Medium (870 ℓ/s)				High (900 ℓ/s)			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
	Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19
5	Total Capacity	kW	14.6	17.2	19.8	22.4	15.0	17.6	20.2	22.9	15.3	18.0	20.6	23.3
	Sensible Heat Capacity	kW	9.7	11.2	12.8	14.2	10.0	11.6	13.1	14.6	10.2	11.8	13.4	15.0
	Water Flow	ℓ/s	0.58	0.68	0.78	0.89	0.60	0.70	0.80	0.91	0.61	0.71	0.82	0.93
	Pressure Drop	kPa	14.3	18.7	23.8	29.5	15.0	19.5	24.8	30.8	15.6	20.2	25.6	31.8
6	Total Capacity	kW	12.7	15.4	17.9	20.4	13.1	15.8	18.3	20.9	13.3	16.1	18.7	21.4
	Sensible Heat Capacity	kW	8.9	10.5	12.0	13.5	9.2	10.8	12.4	13.9	9.4	11.1	12.7	14.2
	Water Flow	ℓ/s	0.51	0.61	0.71	0.81	0.52	0.63	0.73	0.83	0.53	0.64	0.74	0.85
	Pressure Drop	kPa	10.8	15.3	19.9	25.1	11.4	16.0	20.8	26.2	11.9	16.5	21.5	27.1
7	Total Capacity	kW	11.0	13.5	16.1	18.6	11.3	13.9	16.5	19.1	11.5	14.2	16.8	19.5
	Sensible Heat Capacity	kW	8.2	9.8	11.3	12.8	8.4	10.1	11.7	13.2	8.6	10.3	11.9	13.5
	Water Flow	ℓ/s	0.44	0.54	0.64	0.74	0.45	0.55	0.66	0.76	0.46	0.56	0.67	0.77
	Pressure Drop	kPa	8.1	12.2	16.5	21.2	8.5	12.9	17.2	22.1	8.9	13.4	17.8	22.9
8	Total Capacity	kW	9.4	11.9	14.4	16.8	9.6	12.2	14.8	17.2	9.8	12.4	15.1	17.6
	Sensible Heat Capacity	kW	7.5	9.1	10.7	12.1	7.7	9.4	11.0	12.4	7.9	9.6	11.2	12.8
	Water Flow	ℓ/s	0.37	0.47	0.57	0.67	0.38	0.48	0.59	0.69	0.39	0.49	0.60	0.70
	Pressure Drop	kPa	5.9	9.4	13.5	17.6	6.2	9.9	14.1	18.4	6.5	10.3	14.6	19.1
9	Total Capacity	kW	8.0	10.3	12.7	15.2	8.2	10.6	13.1	15.6	8.4	10.9	13.4	15.9
	Sensible Heat Capacity	kW	6.8	8.4	10.0	11.5	7.0	8.7	10.3	11.8	7.2	8.9	10.5	12.1
	Water Flow	ℓ/s	0.32	0.41	0.51	0.60	0.32	0.42	0.52	0.62	0.33	0.43	0.53	0.63
	Pressure Drop	kPa	4.3	7.2	10.8	14.7	4.5	7.6	11.4	15.3	4.7	7.9	11.9	15.9

Note: Performance is based on wet coil, 50Pa ESP, ΔT = 6°C, ½ “ filter and 0m altitude

40LMA080 with AC & EC MOTOR

Entering Water Temp (°C)	Speed (Normal Airflow)		Low (1130 ℓ/s)				Medium (1210 ℓ/s)				High (1260 ℓ/s)			
	Entering Air Temperature													
	Dry Bulb	°C	21	23	25	27	21	23	25	27	21	23	25	27
	Wet Bulb	°C	16	17	18	19	16	17	18	19	16	17	18	19
5	Total Capacity	kW	20.0	23.3	26.7	30.1	20.9	24.3	27.9	31.5	21.4	25.0	28.6	32.3
	Sensible Heat Capacity	kW	13.1	15.2	17.2	19.1	13.8	16.0	18.1	20.1	14.2	16.5	18.6	20.7
	Water Flow	ℓ/s	0.79	0.93	1.06	1.20	0.83	0.97	1.11	1.25	0.85	0.99	1.14	1.28
	Pressure Drop	kPa	28.0	36.6	46.3	57.2	30.2	39.4	50.0	61.7	31.6	41.2	52.2	64.5
6	Total Capacity	kW	17.6	20.9	24.2	27.5	18.4	21.8	25.3	28.8	18.9	22.4	26.0	26.6
	Sensible Heat Capacity	kW	12.1	14.2	16.2	18.1	12.8	15.0	17.1	19.1	13.2	15.4	17.6	19.7
	Water Flow	ℓ/s	0.70	0.83	0.96	1.09	0.73	0.87	1.01	1.14	0.75	0.89	1.03	1.17
	Pressure Drop	kPa	22.3	30.0	38.8	48.5	24.1	32.4	41.9	52.5	25.1	33.9	43.8	54.9
7	Total Capacity	kW	15.3	18.5	21.8	25.1	16.0	19.3	22.8	26.3	16.4	19.9	23.4	27.0
	Sensible Heat Capacity	kW	11.2	13.3	15.2	17.2	11.8	14.0	16.1	18.1	12.2	14.4	16.6	18.7
	Water Flow	ℓ/s	0.61	0.74	0.87	1.00	0.64	0.77	0.91	1.04	0.65	0.79	0.93	1.07
	Pressure Drop	kPa	17.4	24.2	32.1	41.1	18.8	26.1	34.7	44.5	19.6	27.3	36.3	46.5
8	Total Capacity	kW	13.1	16.3	19.5	22.7	13.8	17.1	20.4	23.8	14.1	17.6	21.0	24.4
	Sensible Heat Capacity	kW	10.3	12.4	14.3	16.2	10.8	13.0	15.1	17.1	11.2	13.5	15.6	17.7
	Water Flow	ℓ/s	0.52	0.65	0.78	0.90	0.55	0.68	0.81	0.94	0.56	0.70	0.83	0.97
	Pressure Drop	kPa	13.2	19.4	26.3	34.3	14.6	20.9	28.5	37.1	15.4	21.9	29.8	38.8
9	Total Capacity	kW	11.2	14.3	17.4	20.5	11.7	15.0	18.2	21.5	12.1	15.4	18.7	22.1
	Sensible Heat Capacity	kW	9.3	11.5	13.5	15.4	9.9	12.1	14.2	16.2	10.2	12.5	14.7	16.8
	Water Flow	ℓ/s	0.44	0.57	0.69	0.82	0.47	0.60	0.72	0.85	0.48	0.61	0.74	0.88
	Pressure Drop	kPa	9.6	15.3	21.4	28.5	10.6	16.6	23.1	30.9	11.2	17.4	24.2	32.4

Note: Performance is based on wet coil, 50Pa ESP, ΔT = 6°C, ½ “ filter and 0m altitude

40LMA024 with AC & EC MOTOR

Air Flow	Water Temp. Rise (°C)	Water Temp. Air Temp. (D/B)	°C	50		60		70		80	
			°C	19	21	19	21	19	21	19	21
400 ℓ/s	10	Heating	kW	3.7	3.3	5.7	5.3	7.6	7.2	9.6	9.2
		Water Flow	ℓ/s	0.09	0.08	0.14	0.13	0.19	0.18	0.23	0.22
		Pressure Drop	kPa	1.2	1.0	2.5	2.2	4.2	3.8	6.1	5.6
	15	Heating	kW	2.5	2.1	4.6	4.2	6.6	6.2	8.6	8.2
		Water Flow	ℓ/s	0.04	0.03	0.07	0.07	0.11	0.10	0.14	0.13
		Pressure Drop	kPa	0.3	0.2	0.9	0.7	1.6	1.4	2.4	2.2
450 ℓ/s	10	Heating	kW	4.0	3.6	6.1	5.7	8.3	7.8	10.4	9.9
		Water Flow	ℓ/s	0.10	0.09	0.15	0.14	0.20	0.19	0.25	0.24
		Pressure Drop	kPa	1.4	1.2	2.9	2.6	4.8	4.4	7.0	6.5
	15	Heating	kW	2.7	2.2	5.0	4.5	7.1	6.7	9.3	8.8
		Water Flow	ℓ/s	0.04	0.04	0.08	0.07	0.12	0.11	0.15	0.14
		Pressure Drop	kPa	0.3	0.2	1.0	0.9	1.8	1.6	2.8	2.6
500 ℓ/s	10	Heating	kW	4.2	3.8	6.5	6.0	8.8	8.3	11.0	10.6
		Water Flow	ℓ/s	0.10	0.09	0.16	0.15	0.21	0.20	0.27	0.26
		Pressure Drop	kPa	1.6	1.3	3.2	2.8	5.3	4.9	7.8	7.2
	15	Heating	kW	2.9	2.4	5.2	4.8	7.5	7.1	9.8	9.4
		Water Flow	ℓ/s	0.05	0.04	0.09	0.08	0.12	0.12	0.16	0.15
		Pressure Drop	kPa	0.4	0.3	1.1	0.9	2.0	1.8	3.1	2.9

Note: Performance is based on wet coil, 50Pa ESP, ½ " filter and 0m altitude

40LMA040 with AC & EC MOTOR

Air Flow	Water Temp. Rise (°C)	Water Temp. Air Temp. (D/B)	°C	50		60		70		80	
			°C	19	21	19	21	19	21	19	21
600 ℓ/s	10	Heating	kW	6.7	6.0	9.9	9.2	13.0	12.4	16.2	15.5
		Water Flow	ℓ/s	0.16	0.15	0.24	0.22	0.32	0.30	0.40	0.38
		Pressure Drop	kPa	6.6	5.5	12.7	11.3	20.2	18.4	28.9	26.8
	15	Heating	kW	5.1	4.5	8.4	7.7	11.6	10.9	14.8	14.1
		Water Flow	ℓ/s	0.08	0.07	0.14	0.13	0.19	0.18	0.24	0.23
		Pressure Drop	kPa	2.1	1.6	4.7	4.1	8.0	7.3	12.0	11.1
700 ℓ/s	10	Heating	kW	6.9	6.2	10.3	9.6	13.6	12.9	16.8	16.1
		Water Flow	ℓ/s	0.17	0.15	0.25	0.23	0.33	0.31	0.41	0.40
		Pressure Drop	kPa	7.0	5.9	13.6	12.0	21.6	19.8	31.0	28.8
	15	Heating	kW	5.3	4.6	8.7	8.0	12.0	11.4	15.3	14.7
		Water Flow	ℓ/s	0.09	0.07	0.14	0.13	0.20	0.18	0.25	0.24
		Pressure Drop	kPa	2.2	1.7	5.0	4.3	8.6	7.8	12.9	11.9
800 ℓ/s	10	Heating	kW	7.2	6.5	10.7	10.0	14.1	13.4	17.5	16.8
		Water Flow	ℓ/s	0.17	0.16	0.26	0.24	0.34	0.33	0.43	0.41
		Pressure Drop	kPa	7.5	6.3	14.6	12.9	23.3	21.2	33.3	31.0
	15	Heating	kW	5.5	4.8	9.0	8.3	12.5	11.8	16.0	15.3
		Water Flow	ℓ/s	0.09	0.08	0.15	0.13	0.20	0.19	0.26	0.25
		Pressure Drop	kPa	2.3	1.9	5.3	4.6	9.2	8.3	13.8	12.7

Note: Performance is based on wet coil, 50Pa ESP, ½ " filter and 0m altitude

40LMA060 with AC & EC MOTOR

Air Flow	Water Temp. Rise (°C)	Water Temp. Air Temp. (D/B)	°C	50		60		70		80	
			°C	19	21	19	21	19	21	19	21
800 ℓ/s	10	Heating	kW	9.1	8.3	13.5	12.6	17.7	16.9	22.0	21.1
		Water Flow	ℓ/s	0.22	0.20	0.33	0.31	0.43	0.41	0.54	0.52
		Pressure Drop	kPa	8.2	6.9	15.7	13.9	24.9	22.8	35.6	33.1
	15	Heating	kW	7.1	6.2	11.5	10.6	15.8	15.0	20.1	19.2
		Water Flow	ℓ/s	0.11	0.10	0.19	0.17	0.26	0.24	0.33	0.31
		Pressure Drop	kPa	2.6	2.1	5.8	5.1	10.0	9.0	14.8	13.7
900 ℓ/s	10	Heating	kW	9.4	8.5	13.9	13.0	18.3	17.4	22.7	21.8
		Water Flow	ℓ/s	0.23	0.21	0.34	0.32	0.45	0.42	0.56	0.53
		Pressure Drop	kPa	8.6	7.2	16.6	14.7	26.4	24.1	37.7	35.1
	15	Heating	kW	7.3	6.4	11.8	11.0	16.3	15.4	20.8	19.9
		Water Flow	ℓ/s	0.12	0.10	0.19	0.18	0.27	0.25	0.34	0.32
		Pressure Drop	kPa	2.7	2.2	6.2	5.4	10.5	9.5	15.7	14.5
1000 ℓ/s	10	Heating	kW	9.6	8.7	14.2	13.3	18.7	17.8	23.2	22.3
		Water Flow	ℓ/s	0.23	0.21	0.34	0.32	0.46	0.43	0.57	0.55
		Pressure Drop	kPa	8.9	7.5	17.2	15.3	27.4	25.0	39.2	36.4
	15	Heating	kW	7.5	6.6	12.1	11.2	16.7	15.8	21.2	20.3
		Water Flow	ℓ/s	0.12	0.11	0.20	0.18	0.27	0.26	0.35	0.33
		Pressure Drop	kPa	2.8	2.3	6.4	5.6	10.9	9.9	16.3	15.1

Note: Performance is based on wet coil, 50Pa ESP, ½ " filter and 0m altitude

40LMA080 with AC & EC MOTOR

Air Flow	Water Temp. Rise (°C)	Water Temp. Air Temp. (D/B)	°C	50		60		70		80	
			°C	19	21	19	21	19	21	19	21
1100 ℓ/s	10	Heating	kW	11.3	10.3	16.5	15.5	21.7	20.6	26.8	25.7
		Water Flow	ℓ/s	0.27	0.25	0.40	0.38	0.53	0.50	0.66	0.63
		Pressure Drop	kPa	16.0	13.5	30.3	26.9	47.7	43.6	67.9	63.2
	15	Heating	kW	9.0	7.9	14.3	13.2	19.5	18.5	24.7	23.6
		Water Flow	ℓ/s	0.14	0.13	0.23	0.21	0.32	0.30	0.40	0.39
		Pressure Drop	kPa	5.3	4.3	11.5	10.0	19.3	17.5	28.5	26.4
1250 ℓ/s	10	Heating	kW	12.0	10.9	17.5	16.4	23.0	21.9	28.5	27.3
		Water Flow	ℓ/s	0.29	0.26	0.43	0.40	0.56	0.53	0.70	0.67
		Pressure Drop	kPa	17.7	14.9	33.6	29.9	53.1	48.5	75.7	70.4
	15	Heating	kW	9.5	8.4	15.1	14.0	20.7	19.6	26.2	25.1
		Water Flow	ℓ/s	0.15	0.14	0.24	0.23	0.34	0.32	0.43	0.41
		Pressure Drop	kPa	5.8	4.7	12.7	11.1	21.4	19.4	31.7	29.3
1400 ℓ/s	10	Heating	kW	12.4	11.3	18.2	17.0	23.9	22.7	29.5	28.3
		Water Flow	ℓ/s	0.30	0.27	0.44	0.41	0.58	0.55	0.72	0.69
		Pressure Drop	kPa	18.8	15.9	35.8	31.8	56.6	51.7	80.7	75.1
	15	Heating	kW	9.8	8.7	15.7	14.5	21.4	20.3	27.2	26.0
		Water Flow	ℓ/s	0.16	0.14	0.25	0.23	0.35	0.33	0.44	0.42
		Pressure Drop	kPa	6.2	5.0	13.5	11.8	22.8	20.7	33.8	31.3

Note: Performance is based on wet coil, 50Pa ESP, ½ " filter and 0m altitude

Sound Pressure Level

40LMA with AC MOTOR

Coil # of Row	Model	Speed	Octave Band Centre								
			63	125	250	500	1000	2000	4000	8000	dB(A)
4 Row	40LMA024	H	23.20	30.50	40.10	41.30	46.70	42.10	38.40	28.40	49.80
		M	21.70	29.10	36.60	38.10	43.20	39.40	34.10	24.60	46.50
		L	18.50	27.30	34.90	35.40	40.70	34.70	30.10	20.50	43.70
	40LMA040	H	20.80	37.10	46.00	47.00	48.50	43.90	42.40	30.90	53.20
		M	19.50	35.30	45.10	45.70	47.50	41.70	40.20	28.90	51.90
		L	17.40	32.60	44.10	44.70	45.60	40.60	38.60	26.80	50.50
	40LMA060	H	21.90	34.70	45.30	47.60	47.30	44.80	41.40	31.30	52.90
		M	21.60	34.10	44.50	47.00	46.40	43.90	40.50	36.70	52.20
		L	18.30	32.70	43.60	46.00	45.30	42.80	39.30	28.80	51.00
	40LMA080	H	28.10	37.20	43.60	46.00	49.40	46.20	44.20	35.10	53.60
		M	26.60	35.40	41.90	44.90	48.60	44.50	42.30	31.40	52.30
		L	23.20	31.70	41.50	43.70	46.80	42.50	39.80	28.70	50.60
6 Row	40LMA024	H	25.20	31.70	39.50	41.80	45.00	41.90	37.60	27.00	49.00
		M	20.70	29.50	38.40	40.90	42.90	38.50	34.60	23.10	47.00
		L	14.40	27.40	33.80	36.40	40.50	31.20	31.50	20.10	43.30
	40LMA040	H	20.30	37.00	46.70	47.10	47.70	41.40	40.70	28.40	52.70
		M	18.70	34.80	44.20	44.80	46.80	39.90	38.60	25.80	51.00
		L	15.50	31.50	43.00	43.80	44.20	37.20	37.30	23.20	49.20
	40LMA060	H	22.50	32.90	44.70	46.50	45.40	44.40	38.90	28.90	51.70
		M	20.30	31.60	43.20	45.90	44.80	43.00	38.00	28.30	50.70
		L	18.20	27.90	42.00	44.60	43.30	42.70	36.20	26.30	49.50
	40LMA080	H	25.80	35.40	48.60	49.00	49.00	44.60	40.80	32.10	54.40
		M	24.30	34.30	45.80	46.60	47.60	43.80	40.40	29.80	52.60
		L	21.30	32.80	43.90	45.30	45.80	42.70	37.90	28.50	50.90

40LMA with EC MOTOR

Coil # of Row	Model	Speed	Octave Band Centre								
			63	125	250	500	1000	2000	4000	8000	dB(A)
4 Row	40LMA024	H	23.20	30.50	40.10	41.30	46.70	42.10	38.40	28.40	49.80
		M	21.70	29.10	36.60	38.10	43.20	39.40	34.10	24.60	46.50
		L	18.50	27.30	34.90	35.40	40.70	34.70	30.10	20.50	43.70
	40LMA040	H	20.80	37.10	46.00	47.00	48.50	43.90	42.40	30.90	53.20
		M	19.50	35.30	45.10	45.70	47.50	41.70	40.20	28.90	51.90
		L	17.40	32.60	44.10	44.70	45.60	40.60	38.60	26.80	50.50
	40LMA060	H	21.90	34.70	45.30	47.60	47.30	44.80	41.40	31.30	52.90
		M	21.60	34.10	44.50	47.00	46.40	43.90	40.50	36.70	52.20
		L	18.30	32.70	43.60	46.00	45.30	42.80	39.30	28.80	51.00
	40LMA080	H	28.10	37.20	43.60	46.00	49.40	46.20	44.20	35.10	53.60
		M	26.60	35.40	41.90	44.90	48.60	44.50	42.30	31.40	52.30
		L	23.20	31.70	41.50	43.70	46.80	42.50	39.80	28.70	50.60
6 Row	40LMA024	H	25.20	31.70	39.50	41.80	45.00	41.90	37.60	27.00	49.00
		M	20.70	29.50	38.40	40.90	42.90	38.50	34.60	23.10	47.00
		L	14.40	27.40	33.80	36.40	40.50	31.20	31.50	20.10	43.30
	40LMA040	H	20.30	37.00	46.70	47.10	47.70	41.40	40.70	28.40	52.70
		M	18.70	34.80	44.20	44.80	46.80	39.90	38.60	25.80	51.00
		L	15.50	31.50	43.00	43.80	44.20	37.20	37.30	23.20	49.20
	40LMA060	H	22.50	32.90	44.70	46.50	45.40	44.40	38.90	28.90	51.70
		M	20.30	31.60	43.20	45.90	44.80	43.00	38.00	28.30	50.70
		L	18.20	27.90	42.00	44.60	43.30	42.70	36.20	26.30	49.50
	40LMA080	H	25.80	35.40	48.60	49.00	49.00	44.60	40.80	32.10	54.40
		M	24.30	34.30	45.80	46.60	47.60	43.80	40.40	29.80	52.60
		L	21.30	32.80	43.90	45.30	45.80	42.70	37.90	28.50	50.90

Note: Sound measurement in accordance with JIS B 8616:2006 Standard (1.5m below the unit bottom) at 76Pa ESP

40LMA with AC MOTOR

Model	Voltage	Phase	Hz	Operating Volts *		Motor	
				Max.	Min.	LRA	FLA
40LMA024	240	Single	50	253	207	6.4	2.5
40LMA040						7.8	4.1
40LMA060						12.1	4.9
40LMA080						21.0	6.9

LRA : Locked Rotor Amps
FLA : Full Load Amps
* Permissible limits of the voltage range at which the unit will operate satisfactorily.

40LMA with EC MOTOR

Model	Voltage	Phase	Hz	Operating Volts *		Motor	
				Max.	Min.	LRA	FLA
40LMA024	240	Single	50	253	207	BDT	1.70
40LMA040						BDT	1.70
40LMA060						BDT	6.57
40LMA080						BDT	6.57

BDT: When motor locked, driver will shut down speed command after 10 seconds.

Typical Motor Power Input Comparison

Model	Motor Power Input Comparison		% Saving
	AC Motor	EC Motor	
40LMA024	614	590	4%
40LMA040	811	715	12%
40LMA060	1140	1030	10%
40LMA080	1680	1060	37%

Note: Data based on unit with 4-rows coil, fan running at high speed with 50Pa ESP

Furnish and install fan coil units in the location and manner shown in IOM. Units shall be suitable for use with 240 V-1 Ph-50Hz electrical supply.

COILS

Coils shall be rated in accordance with ARI standard 410. The coils shall be tested at 2760kPa air pressure while submerged in water. The coils shall be equipped with manual air bleed/vent valve. The base units shall be completed with 4-row chilled water coil or optional 6-row which equipped with 1" copper connections for both supply and return line. These coils shall be constructed with lanced sine wave aluminum plate fins mechanically bonded to 3/8 (9.5mm) copper tubing with all joints brazed. Optional 1-row hot water heating coil with 1/2" copper connection is fitted inside the unit attached to the Chilled Water coil. This Heating Coil can only be supplied in conjunction with the Chilled Water Coil. This coil shall be constructed with double wavy aluminum plate fins mechanical bonded to 1/2" (12.7mm) copper tubing with all joints brazed. All coils shall be with a nominal 472 fins per meter with copper headers. Coils connection can be chosen for either left or right connection.

CASING

Unit casing construction shall be single skin 1mm thick galvanized steel with internal lined with 25.4mm Polyurethane laminated with aluminum foil. Condensate drain pan shall be painted galvanized steel insulated with 6.4mm thick closed cell polyethylene foam and pitch for positive drainage with unit level. Optional unpainted Stainless steel drain pan with PE insulation is also available. The drain pan connection shall be 3/4" NPT male.

FAN

Fan(s) shall be DIDW forward curved centrifugal type direct driven by a resiliently mounted permanent split capacitor motor.

SERVICEABILITY

The unit shall have a side access panel at coil side providing access to the fan motor and drain tray. The electrical terminal block (including capacitor) shall be mounted on the unit exterior opposite coil side.

SOUND

The unit shall be of quiet operation suitable for typical commercial operation.

FILTER ACCESSORY

The base units shall only be with return air spigot without filter. Optional air filter frame shall be fitted to the unit return air spigot. This add-on filter track shall be capable of receiving the standard 12mm thick frame with EU2 grade media or optional 25mm with higher EU3 grade media. The filter shall be able to be fitted in either left or right hand position (following the coils connection) with side withdrawal of filter as well as front withdrawal.

MOTOR - AC

Fan motor shall be 3 – Speed, 240V, single phase, 50Hz. Permanent split capacitor type with ball type bearings and oversized oil reservoirs to ensure lubrication.

The fan motor shall be equipped with integral automatic temperature reset for motor protection. Motor insulation is class B & IP20 rating enclosure.

MOTOR - EC

Fan motor shall be multi-speed, 240V, single phase, 50Hz. Electronically commuted motor and low energy consumption.

The motor offer higher efficiency and reliability, longer lifetime (no brush erosion) and overall reduction of electromagnetic interferences.

The EC motor are with built-in driver and controller are supplied with the EC motor for constant air flow and low noise. Unit with EC motor is capable to be connected to BMS controller. Motor installation is class B and IP21 rating with open drip proof enclosure.



Carrier improves the world around us; Carrier improves people's lives; our products and services improve building performance; our culture of improvement will not allow us to rest when it comes to the environment.



 contact@carrier.co.id

 www.carrier.co.id